

Deleted: GMB

Inserted: GMB – D R A F T¶

1 – VERSION HISTORY

2.0 12/31/2003

[DRAFT This is the second draft version of the initial release of the Internet Electronic Transport (ET) standard]

Deleted: first

Inserted: first draft version of the

Deleted: [Interim change notes are at the end of this draft document]¶¶

Formatted: Position: Horizontal: Center, Relative to: Margin, Vertical: 0", Relative to: Paragraph, Wrap Around

Deleted: 11/18/2003

2 – INTRODUCTION

The North American Energy Standards Board (NAESB) is a voluntary non-profit organization comprised of members from all aspects of the greater gas and electric industries. The NAESB mission is to take the lead in developing and implementing standards across the industry to simplify and expand electronic communication, and to streamline business practices. The vision of NAESB is a seamless North American marketplace for energy, as recognized by its customers, the business community, industry participants and regulatory bodies.

Deleted: This will lead to

NAESB Internet Electronic Transport (Internet ET) Standards are used by the Wholesale Gas Quadrant (WGQ), Retail Electric Quadrant (REQ), and the Retail Gas Quadrant (RGQ) for the electronic transport of transactions and other information payloads between trading partners.

Deleted: (

Deleted:)

Deleted:

NAESB recognizes that as the energy industry evolves and uses NAESB standards, additional and amended NAESB standards will be necessary. Any industry participant seeking additional or amended standards (including principles, definitions, standards, data elements, process descriptions, technical implementation instructions) should submit a request detailing the change to the NAESB office so that the appropriate process may take place to amend the standards.

Deleted: The standards are written as 'minimums', which industry participants are encouraged to exceed through provision of value-added services and customized arrangements. NAESB defines 'exceed the minimum standard' to mean surpassing the standards without negative impact on contracting and non-contracting parties.¶

Deleted: All of the standards have been adopted in the realization that as

Deleted: the

TAB 1 Version Notes

Contains notes about this version, and, if appropriate, a brief summary of changes from the immediately preceding version.

TAB 2 Introduction

Provides a background statement about NAESB's Mission and the underlying concepts behind the design and use of this guide.

TAB 3 Executive Summary

Provides a brief outline of the industry business situation which is the basis for development of this guide.

TAB 4 Business Process & Practices

Provides a brief overview of the business process and the NAESB-approved principles, definitions and standards related to the business process covered by this guide.

TAB 5 Related Standards

Provides a reference to any related standards.

Deleted:

TAB 6 Technical Implementation – Internet Electronic Transport (Internet ET)

Provides an overview of the business process for Internet ET.

Deleted: ET

Data Dictionary

Provides definition of the standard data elements and the usage requirements for each element.

Formatted: Position: Horizontal: Center, Relative to: Margin, Vertical: 0", Relative to: Paragraph, Wrap Around

Batch Flow Diagram

Deleted: 11/18/2003

Deleted: GMB

Inserted: GMB – D R A F T¶

Sending Electronic Packages

Provides instructions to develop mechanisms for sending of NAESB standard format data files.

Receiving Electronic Packages

Provides instructions to develop mechanisms for receiving of NAESB standard format data files.

Security

Provides guidelines for data privacy, data integrity, authentication and non-repudiation of inbound and outbound packages.

Other Considerations

Provides information regarding error notification and testing. Includes a reference guide and examples for repudiation and validation.

TAB 7 Testing Guidelines

Provides guidelines for testing the Internet ET standards.

TAB 8 Tables and Appendices

Table 1 – Internet ET Error Codes

Appendix A – Reference Guide

Appendix B – Internet ET FAQ

Appendix C – Sample Technical Exchange Worksheet (TEW)

Deleted: TAB 8 Appendices¶

Formatted: Left

Deleted: Repudiation and Validation Examples

Deleted: Minimum Technical Characteristics for an EDM Server

Deleted: Appendix E – TCP standards¶

Deleted: ¶

Formatted: Position: Horizontal: Center, Relative to: Margin, Vertical: 0", Relative to: Paragraph, Wrap Around

Deleted: 11/18/2003

3 – EXECUTIVE SUMMARY

The North American Energy Standards Board (NAESB) Wholesale Gas Quadrant (WGQ), Retail Electric Quadrant (REQ), and Retail Gas Quadrant (RGQ) have developed standards for electronic commerce over the Internet. The Internet Electronic Transport ([Internet ET](#)) standards enable the rapid, reliable, and safe transportation of electronic information between NAESB trading partners.

This document is a high-level guide to implementing various technologies necessary to communicate transactions and other electronic data using standard protocols. As such, this guide is not intended to be a comprehensive, in-depth manual. Where possible, this guide points to more in-depth material. The Reference section provides locations on the Internet to obtain more information as well as recommended books and periodicals.

Comment:

BUSINESS REASONS FOR USING INTERNET ET

Energy companies need to exchange information and data with other energy companies. Internet ET enables this with the following advantages:

Security. Internet ET incorporates the PAIN security principles of Privacy, Authenticity, Integrity and Non-repudiation.

Standardized Process. Internet ET standardizes how packages are exchanged, regardless of the business process, the trading partner, or the energy quadrant.

Audit Trail. Internet ET gives both Sender and Receiver a detailed audit trail, enabling better controls and less errors.

Error Notification. Internet ET prescribes how errors are to be handled, and provides a foundation for efficient and quick resolution to errors.

Minimum technology requirements. Internet ET is built on low-cost technology [and readily-available](#), Web browser [and open source technology](#).

Deleted: . Its ability to be used via a standard

Deleted: make implementation low-cost.

Interactive and Batch Capabilities. Internet ET provides mechanisms for both fully-automated and manual-assisted business processes.

Any Payloads. Internet ET can deliver any kind of payload, whether it is EDI, flatfiles, XML, documents, etc.

Deleted: makes it more likely that

Inserted: makes it more likely that Commercial Off-The-Shelf (COTS) software packages can be purchased to replace custom written applications currently in place to support legacy systems.

Software Standards. [The Internet ET standards increase the likelihood that software vendors will provide Commercial Off-The-Shelf \(COTS\) software packages.](#)

Deleted: can be purchased to replace custom written applications currently in place to support legacy systems.

Formatted: Position: Horizontal: Center, Relative to: Margin, Vertical: 0", Relative to: Paragraph, Wrap Around

Deleted: 11/18/2003

OVERVIEW OF ELECTRONIC TRANSPORT LIFE CYCLE

In the Internet ET life-cycle, the party sending data, the "Sender", creates an electronic package by encrypting the data payload and applying appropriate header 'envelope' information such as 'to' and 'from'. This electronic package is submitted to the trading partner's SSL Web server as an HTTP Request using the POST method.

The receiving party, the "Receiver", receives and decrypts the package, then forwards the

- Payload Content Independence. Internet ET standards focus on the transport of the electronic package, and not the contents of the package. Each business process may define different contents. Internet ET is designed to work with any type of content (e.g. EDI, flat files, etc). The Internet ET's main function is to get the package from point X to point Y reliably with privacy, authentication, integrity, and non-repudiation.
- Importance of the Technical Exchange Worksheet (TEW). Internet ET relies on the exchange of technical information between trading partners to establish and maintain reliable Internet ET production. A sample TEW is included in Appendix ??GMB. The TEW may be a part of a TPA.
- Testing With Internet ET Trading Partners. Since the Internet ET is not platform-specific, testing with other trading partners on a variety of platforms is very important in ensuring that each Internet ET application is compatible with a range of platforms used by various trading partners. Testing should ensure receipt of the package, proper decryption, and appropriate receipts were sent.
- Lack of Internet Quality of Service (QoS). Implementers of Internet ET should be aware that the Internet lacks QoS. Internet transfer of low-priority files (e.g. song MP3's) have equal access to Internet bandwidth as high-priority files (e.g. Nominations). Business processes that have firm or tight timing requirements should be constructed to properly mitigate the risk associated with the lack of guaranteed QoS on the Internet.

NAESB Internet ET in relation to IETF EDINT AS2

"HTTP Transport for Secure EDI" There are business benefits gained from adherence to "HTTP Transport for Secure EDI" such as: a) Allows potential to more readily, electronically trade with others (e.g., utilities, financial institutions, suppliers, retail customers); b) Makes it more likely that Commercial Off-The-Shelf (COTS) software packages can be purchased to replace custom written applications currently in place to support legacy GISB/NAESB EDM; c) Strengthens the surety of receipt and error notification

??CLB AS2 GISB/UCC profiles; AS2 has lost GISB references; divergence regarding PKI/PGP??; HTTP Transport for Secure EDI (AS2)??AS2 profiles?? is an emerging standard, largely based on the original NAESB WGQ EDM, that is being developed by the Internet Engineering Task Force, the Internet standards body. Adherence with a formal, international Internet standard, such as AS2 ensures that the specification will not change without due process and any changes that do occur will be the result of a broad consensus in the international community. Individual companies and entire industries are free to use as much or as little of AS2 as they see fit, providing the maximum flexibility to meet business needs. The specific implementation of the standards is dependent upon what fits the trading partner's needs and available resources. A brief delineation of these components is covered at a high level in the Business Process and Practices (Major functions of Internet EDM covered by the Standards) section and in more detail in later sections.

Further Information

Please see the NAESB home page at <http://www.naesb.org/> for additional useful information on the implementation of Internet ET.

Deleted: GMB

Inserted: GMB – D R A F T

Deleted: s

Deleted: of the Electronic Package Do Not Matter

Deleted: –

Deleted: The

Deleted: s

Deleted: Trading Partner Agreement (TPA)

Deleted: -

Deleted: –

Inserted: –

Deleted: TPA for key responsibilities of each trading partner.

Inserted: TPA for key responsibilities of each trading partner.

Deleted: The expectations of who will perform what function and how it will be accomplished in Internet ET should be laid out in the trading partner agreement.

Deleted: ??GMB consistent use of Tech exchange; mockup; ET Technical exchange worksheet; review TPA; should we add a section that details elements of the TPA that are relevant to the ET??

Inserted: GMB consistent use of Tech exchange; mockup; ET Technical exchange worksheet;

Deleted: Energy Industry

Deleted: Participants

Formatted: Bullets and Numbering

Deleted: Lacks

Deleted: Concerns About Future Reliability of the Public Internet. The nature of Internet design requires that continued monitoring of the Internet's viability as an infrastructure take place.

Deleted: Quality of Service (QoS)

Formatted: Position: Horizontal: Center, Relative to: Margin, Vertical: 0", Relative to: Paragraph, Wrap Around

Deleted: 11/18/2003

4 – BUSINESS PROCESS AND PRACTICES

Deleted: [refer to iet_Tab04-20031015.doc for change history]¶

A. OVERVIEW

Role of Internet Electronic Transport (ET) in NAESB WGQ, REQ, and RGQ Quadrants

Business processes defined by NAESB quadrants require the exchange of transactions and transaction data. The Internet ET, in concert with Quadrant-specific Electronic Delivery Mechanisms (QEDMs), enables NAESB parties to securely and reliably exchange transactions over the Internet. Internet ET electronic ‘packages’ are created using the standards defined in this document.

Version 2.0LS of the Internet ET standard incorporates all electronic transport technical specifications of the NAESB WGQ EDM Version 1.7, including mutually-agreeable business practices to protect the sender of a document with non-repudiation and with digitally-signed Error Notifications. [??GMB add'l v1.7 ET stuff?](#)

Deleted: ??XX

Deleted: (OPEN ISSUE 028)

Deleted: 6

Roles in Internet ET

In the Internet ET life-cycle, one party sends a package, and the other party receives the package. The sender is also referred to as the Client and the receiver as the Server.

NAESB business processes often require that parties act in both the Sender and Receiver roles. For example, once the Receiver of a payload file of Nominations has successfully processed the payload, they switch to the Sender role to send an acknowledgement back to the original Sender. Internet ET implementations may need to implement both Sender and Receiver capabilities.

Deleted:

Deleted: sender

Deleted: features

Deleted: ??GMBTechnical Connectivity Worksheets and Trading Partner Agreements¶

Inserted: ??GMB

Formatted: Space Before: 0 pt

Formatted: Bullets and Numbering

Formatted: Bullets and Numbering

Deleted: <#>contact information¶

Deleted: .

Formatted: Bullets and Numbering

Formatted: Space Before: 0 pt, No bullets or numbering

Deleted: ??GMBThe Trading Partner Agreement is often used to communicate information about each party's Internet ET implementation, including contact information, digital keys, designated site URLs, values used for variable parameters, and optional features (OPEN ISSUE 008). Refer to ??¶

Inserted: Refer to ??

Formatted: Position: Horizontal: Center, Relative to: Margin, Vertical: 0", Relative to: Paragraph, Wrap Around

Deleted: 11/18/2003

The standards adopted for Internet ET should be adhered to by the trading parties as minimum standards. A trading party may offer additional functions or features as options but should not require their use. Such additional features or functions are termed “mutually agreed to”. If both trading partners agree on the inclusion, the additional feature requirements will be met. If either trading party does not agree to the inclusion of additional features, then the partners must allow for transmission and receipt of data using the minimum standards.

To establish an Internet ET trading partnership with another company, a company needs to exchange technical information about their Internet ET implementation. This may include:

- [contact information](#)
- [public keys, including key exchange and update policies](#)
- [test URLs](#)
- [production URLs, including alternative paths if available](#)
- [Common Code Identifiers \(e.g. DUNS number\)](#)
- [Use of 'time-c-qualifier' if in REQ or RGQ](#)

This may be exchanged using a Technical Exchange Worksheet (TEW). A sample TEW is in Appendix ??GMB. In some cases, this information may be exchanged with a Trading Partner Agreement.

Implementation Approaches

The NAESB Internet ET can be constructed using any IT deployment model, including in-house development, using consulting/development help from a third-party, using Commercial Off-The-Shelf (COTS) software, or using an outsourced solution with a third-party. The best solution for each organization must be determined based on the assessment of specific needs and the resources available to that organization.

All parties should fully investigate the ramifications of implementing electronic commerce using the Internet. This includes ensuring that all customer data, internal data, and applications are secured from intruders or other parties not authorized for access.

Participation in electronic commerce over the Internet involves hardware, software, and technical expertise. Hardware requirements may include a server to receive incoming Internet ET packages and a firewall to block intruder access. Software includes operating software for the servers, including the firewall, programming languages which support Internet technologies, and encryption/decryption software to provide security during the transfer. Technical expertise may be involved in the development and maintenance of server applications to process incoming files as well as applications to initiate communication with the server of your trading partner.

Third-party providers offer a variety of services from a full “turn key” solution to assistance where you require it, including programming, system configuration, system administration and private communication links. Criteria for selecting an outsourced Internet ET service provider should consider their ability and experience with Internet ET standards for HTTP Request and Response validation and processing.

Internet ET Network Connections

Trading partners should maintain redundant connections to the public Internet for Internet ET sites. These redundant connections should be topographically diverse paths to minimize the probability of a single point of failure. Three possible approaches to redundant connections are:

1. Maintain multiple ISPs and multiple points of connectivity, each of which was identified by the same URL making the process of redundancy transparent to the sender.
2. Maintain different Internet connectivity URLs (presumably on topographically different ISPs). For this to result in communication redundancy, the sender should know of the existence of the secondary URL and have programming in place that will automatically switch batch-browser transmissions to the secondary URL when the primary URL is unavailable.
3. Maintain multiple connections to the same ISP. This involves only one URL but the presumption would be that the ISP would provide alternate diverse paths for the URL.

Servers may maintain multiple URLs and, if such have been disclosed, the sender should attempt to use these during primary URL outages. The redundant public Internet connections can be through a single ISP or multiple ISPs. If multiple URLs are provided for Internet ET access, the following conditions should be met:

- The information provided by each URL should be exactly the same, although the “trans-id” sequences may differ.
- The trading partners should be informed of both URLs and their availability.
- The URLs should be identified as primary and secondary if either:

There is a TSP connection speed difference between the URLs (The	OR	One URL is only available when the other is down (primary URL being the
--	----	---

Deleted: by system wide notice or by TPA.

Formatted: Position: Horizontal: Center, Relative to: Margin, Vertical: 0", Relative to: Paragraph, Wrap Around

Deleted: 11/18/2003

Deleted: GMB

Inserted: GMB – D R A F T¶

faster connection listed as primary)		most available)
--------------------------------------	--	-----------------

- The URLs should be listed as primary and alternate if:

The URLs have the same TSP connection speed	AND	The URLs are customarily available simultaneously
---	-----	---

In the context of communication redundancy, a URL is considered available if all the TCP/IP facilities are properly functioning up to and including the HTTP service. This includes firewalls, DNS servers, routers, hubs, LANs, etc. between your HTTP server and your Internet Service Provider's point of presence.

In this context redundancy refers to normal operations redundancy, not to disaster recovery contingencies. Disaster recovery contingencies are not addressed in NAESB Internet ET standards.

Private network connections to access NAESB Internet ET sites may be at any point on a party's firewall boundary at the party's discretion on a non-discriminatory basis. The specific type and speed of their connection should be mutually agreed. It is at the discretion of the party how multiple private network connections should be managed.

TCP Communications

NAESB Internet ET Principle 4.1.x37 and NAESB Internet ET Standard 4.3.x70 restrict the TCP ports used as a standard for Internet ET communications. The use of NAESB standard TCP ports may require modifications in the Sender's and Receiver's firewalls to allow for communications with various trading partners, Internet ET implementations. Parties should indicate to their trading partners which specific TCP ports are required to be opened to conduct electronic communication.

Internet ET allows the following TCP Ports (not UDP ports)

- HTTP HTTPS 80, 443, 5713, 6112, 6304, 6874, 7403
- TCP Optional 8001-8020**

**The reservation of 20 optional ports provides for additional security and for implementations such as load balancing. Parties should minimize the number of ports used for Internet ET.

Communication Protocols

HTTP POST - HTTP POST is the standard method for transporting Internet ET packages to trading partners. The POST method allows the upload of complete datasets without special encoding.

MIME "multi-part" - Internet ET packages are created using the "multi-part" content type.

Sending Secure Internet ET Packages

Internet ET supports both interactive and batch browsers. Interactive web browsers provide for low-cost access to Internet ET capabilities. A batch browser allows organizations to maximize their level of automation. The batch browser can be an event-driven mechanism used to push Internet ET packages to your trading partners in real-time or near real-time, while providing

Deleted: Disaster recovery contingencies are not addressed in these NAESB Internet ET standards.¶

Deleted: WGQ

Deleted: WGQ

Deleted: the

Deleted: service providers'

Deleted:

Deleted: Upon request, p

Deleted: they

Deleted: See Appendix E for a list of allowable TCP ports. (OPEN ISSUE 007)

Deleted: TCP guidelines will be reviewed, updated, and changes presented to the NAESB Executive Committees for adoption for inclusion in the next Internet ET release.

Formatted: NAESB Para Default, Adjust space between Latin and Asian text, Adjust space between Asian text and numbers

Deleted: Allowable

Inserted: Allowable TCP Ports (not UDP ports)¶
HTTP HTTPS 80, 443, 5713, 6112, 6304, 6874, 7403¶
TCP Optional 8001-8020**¶

¶
**The reservation of 20 optional ports provides for additional security and for implementations such as load balancing. Parties should minimize the number of ports used for Internet ET.¶

Formatted: Font: 11 pt, Complex Script Font: Times New Roman, 12 pt

Formatted: Bullets and Numbering

Deleted: ime

Deleted: provides for low-cost interactive Web browser access.

Formatted: Position: Horizontal: Center, Relative to: Margin, Vertical: 0", Relative to: Paragraph, Wrap Around

Deleted: 11/18/2003

better audit trails.

Receiving Internet ET Packages

Receiving Internet ET packages and transaction payloads requires a Receiving Program. The Receiving Program:

- Parses the Internet ET package parameters and files to determine if the appropriate parameters were transmitted
- Saves a log including a time stamp for the package
- Stores the payload file
- Sends the Receipt as an HTTP Response to the Client with the timestamp and other required Receipt elements

In some cases the Receiving program decrypts the file prior to sending the Receipt. In this scenario decryption errors would be communicated in the Receipt. Some trading partners decrypt after sending the Receipt. Decryption errors detected after the Receipt is sent are communicated to trading partners using Internet ET Error Notification standards. Parties should notify trading partners of how decryption errors will be communicated.

If trading partners mutually agree to use signed Receipts, then the application would additionally attach a digital signature to the Receipt.

After the Receiving program performs its functions without errors, the payload file is forwarded to other processes including security, translation, and back-office systems.

Security

NAESB Internet ET establishes several security measures as standards to ensure a minimum level of confidence in conducting business over the Internet, and to provide uniformity in the implementation of security. Four security concepts, often referred to by the acronym PAIN, are vital to protecting Internet ET packages:

- Data Privacy
- Authentication
- Data Integrity
- Non-repudiation

Data Privacy and Encryption

Privacy is the assurance to an entity that no one can read a particular piece of data except the receiver(s) explicitly intended. Data privacy is accomplished by encrypting payload files. Internet ET allows encryption using:

PGP 6.5 or higher, with RSA keys. Previous versions of PGP are not compatible with OpenPGP	OR	OpenPGP, defined by IETF RFC 2440. OpenPGP can be used on a mutually-agreed basis
---	----	--

Internet ET 128-bit SSL is used to protect username and passwords.

Deleted: Starting in WGQ EDM v1.6 and

Deleted: v1.0,

Formatted: Position: Horizontal: Center, Relative to: Margin, Vertical: 0", Relative to: Paragraph, Wrap Around

Deleted: 11/18/2003

Authentication

Authentication is the assurance to one entity that another entity is who he/she/it claims to be. Basic authentication is the required standard to prevent intruders from connecting to Internet ET

Web sites. Internet ET uses 128-bit SSL-protected usernames and passwords to establish authentication. Optional techniques such as firewall security enable further authentication. ??GPD; base64-encoding

Integrity

Integrity is the assurance to an entity that data has not been altered, intentionally or unintentionally, between there and here, or between then and now. Data Integrity is established via PGP/OpenPGP encryption, and via the “content-length” HTTP header field.

Non-Repudiation

Non-repudiation is the assurance to an entity that a party cannot deny having engaged in the transaction, or having sent the electronic message. It is like a Notary seal. The Sender of a file includes in the Internet ET package a digital signature that is created using their Private key. The Receiver knows the Sender is legitimate by decoding the digital signature using the Sender’s Public key.

B. GENERAL STANDARDS

Principles:

- 0.1.1 An entity is a person or organization with sufficient legal standing to enter into a contract or arrangement with another such person or organization (as such legal standing may be determined by those parties) for the purpose of conducting and/or coordinating energy transactions.
- 0.1.2 There should be a unique entity common code for each entity name and there should be a unique entity name for each entity common code.

Standards:

- 0.3.1 Entity common codes should be “legal entities”, that is, Ultimate Location, Headquarters Location, and/or Single Location (in Dun & Bradstreet Corporation (“D&B”) terms). However, in the following situations, a Branch Location (in D&B terms) can also be an entity common code:
 - 1. when contracting party provides a D-U-N-S®¹ Number at the Branch Location level;
 - OR
 - 2. to accommodate accounting for an entity that is identified at the Branch Location level.

¹ D-U-N-S® is a registered trademark of Dun & Bradstreet, Inc.

Deleted: GMB

Inserted: GMB – D R A F T

Deleted: Starting in NAESB WGQ EDM v1.6 and

Deleted: v1.0

Deleted: ,

Deleted: is used to protect username and passwords.

Deleted: Additional

Formatted: Position: Horizontal: Center, Relative to: Margin, Vertical: 0", Relative to: Paragraph, Wrap Around

Deleted: 11/18/2003

C. INTERNET ELECTRONIC TRANSPORT RELATED STANDARDS

Principles:

- 4.1.1 [Deleted]
- 4.1.2 The Internet Electronic Transport (ET) does not pick winners, rather it should create an environment where the marketplace can dictate a winner or winners.
- 4.1.3 The solutions should be cost effective, simple and economical.
- 4.1.4 The solutions should provide for a seamless marketplace for energy.
- 4.1.5 [Deleted]
- 4.1.6 Parties should interface with third-party vendors according to NAESB Internet ET standards.
- 4.1.7 Electronic communications between parties to the transaction should be done on a non-discriminatory basis, whether through an agent or directly with any party to the transaction.
- 4.1.8 [Deleted]
- 4.1.9 [Not applicable to ET]
- 4.1.10 [Not applicable to ET]
- 4.1.11 [Deleted]
- 4.1.12 Protocols and tools that parties elect to support should be “Internet-compatible”.
- 4.1.13 [Not applicable to ET]
- 4.1.14 The industry should use standard policies and guidelines for testing.
- 4.1.15 The NAESB Internet ET should not set standards for site-level security. Individual organization security standards should be relied upon.
- 4.1.16 [Not applicable to ET]
- 4.1.17 [Not applicable to ET]
- 4.1.18 [Not applicable to ET]
- 4.1.19 [Not applicable to ET]
- 4.1.20 [Not applicable to ET]
- 4.1.21 [Not applicable to ET]
- 4.1.22 [Not applicable to ET]
- 4.1.23 [Not applicable to ET]
- 4.1.24 [Not applicable to ET]
- 4.1.25 [Not applicable to ET]
- 4.1.26 [Not applicable to ET]
- 4.1.27 [Not applicable to ET]
- 4.1.28 [Not applicable to ET]

Formatted: Position: Horizontal: Center, Relative to: Margin, Vertical: 0", Relative to: Paragraph, Wrap Around

Deleted: 11/18/2003

- 4.1.29 [Not applicable to ET]
- 4.1.30 [Not applicable to ET]
- 4.1.31 [Not applicable to ET]
- 4.1.32 [Not applicable to ET]
- 4.1.33 [Not applicable to ET]
- 4.1.34 [Not applicable to ET]
- 4.1.35 [Not applicable to ET]
- 4.1.36 Trading partners should maintain redundant connections to the public Internet for NAESB Internet ET Web sites. These redundant connections should be topographically diverse (duality of) paths to minimize the probability of a single point of failure.
- 4.1.37 Internet ET implementations should minimize the number of outbound ports required to be opened on the client-side firewall.
- 4.1.38 [Not applicable to ET]
- 4.1.39 Trading Partners should mutually select and use a version of the NAESB Internet ET standards under which to operate, unless specified otherwise by government agencies. Trading Partners should also mutually agree to adopt later versions of the NAESB Internet ET standards, as needed, unless specified otherwise by government agencies.

Definitions:

- 4.2.1 [Not applicable to ET]
- 4.2.2 [Not applicable to ET]
- 4.2.3 [Not applicable to ET]
- 4.2.4 [Not applicable to ET]
- 4.2.5 [Not applicable to ET]
- 4.2.6 [Not applicable to ET]
- 4.2.7 [Not applicable to ET]
- 4.2.8 [Not applicable to ET]
- 4.2.9 [Not applicable to ET]
- 4.2.10 [Not applicable to ET]
- 4.2.11 [Not applicable to ET]
- 4.2.12 [Not applicable to ET]
- 4.2.XX [Not applicable to ET]
- 4.2.13 [Not applicable to ET]
- 4.2.14 [Not applicable to ET]
- 4.2.15 [Not applicable to ET]
- 4.2.16 [Not applicable to ET]

Formatted: Position: Horizontal: Center, Relative to: Margin, Vertical: 0", Relative to: Paragraph, Wrap Around

Deleted: 11/18/2003

Deleted: GMB

Inserted: GMB – D R A F T

- 4.2.17 [Not applicable to ET]
- 4.2.18 [Not applicable to ET]
- 4.2.19 [Not applicable to ET]
- 4.2.20 Testing electronic packages between trading partners includes testing of:
 - 1. Connectivity;
 - 2. Encryption/Decryption;
 - 3. Digital signatures where appropriate
- 4.2.x21 “Failover” defines a scenario a prescribed process is executed when a NAESB Internet ET Client fails to establish a connection to the target NAESB Internet ET Server.
- 4.2.x22 “Trading Partner” is a party that enters into an agreement with another party to transact business electronically using the Internet ET standard.
- 4.2.x23 “Originating party” is any party originating/creating the package . This could also include a third-party.
- 4.2.x24 “Third-Party” is any organization that a trading party uses to provide services to comply with the required elements of the Internet ET.
- 4.2.x25 “Receiving Party” is any party that hosts (either in-house or outsourced) an Internet ET compliant server capable of receiving Internet ET packages.
- 4.2.x26 “Trading Partner Agreement”, or “TPA” is a legal agreement between trading parties. The TPA often dictates service level agreements and problem remediation processes. The TPA may include technical exchange information such as URLs, etc.
- 4.2.xx “Batch Browser”. A Browser that can be run with little or no manual operation or intervention. See “Browser”
- 4.2.xx “Browser”. A software program capable of generating HTTP Requests, including HTTP POST requests.
- 4.2.xx “Client”. The computer hardware and software used by the Sender to transmit an Electronic Package to the Receiver’s Server. A Client can be fully-automated or manual.
- 4.2.xx “COTS”. Commercial Off-The-Shelf; software that can be purchased that requires little or no customization.
- 4.2.xx “Electronic Package”. A data stream sent via HTTP POST that contains envelope header information and Payload File(s). The Payload Files are encrypted using defined Internet ET encryption techniques.
- 4.2.xx “Error Notification”. Errors that are trapped after the Internet ET Receipt is sent are communicated via an Error Notification package from the Receiver of the original data to the Sender.
- 4.2.xx “HTTP Request”. The stream of data sent from the Client to the Server that includes header information and payload data.
- 4.2.xx “HTTP Response”. The stream of data sent from the Server to the Client in response to an HTTP Request.
- 4.2.xx “HTTP Server”. A computer capable of receiving HTTP Requests and responding with HTTP Responses.
- 4.2.xx “IETF”. Internet Engineering Task Force; a body of technical experts that set

Deleted: is agreement

Deleted: (OPEN ISSUES 008)

Formatted: Position: Horizontal: Center, Relative to: Margin, Vertical: 0", Relative to: Paragraph, Wrap Around

Deleted: 11/18/2003

Deleted: GMB

Inserted: GMB – D R A F T¶

standards, known as Requests for Comments (RFC) for the Internet.

- 4.2.xx “Interactive Browser”. A Browser that requires manual operation or intervention. See “Browser”.
- 4.2.xx “Internet EDM”. The GISB and NAESB WGQ standards up to and including Version 1.7. The “Internet ET” and “QEDM” standards were derived from these EDM standards.
- 4.2.xx “Internet Electronic Transport”, or “Internet ET”. The NAESB standards for the secure transport of electronic information between trading partners.
- 4.2.xx “Package”. See “Electronic Package.”
- 4.2.xx “Payload Files”. The data contents inside of an electronic package. NAESB Internet ET is content-independent.
~~4.2.xx “Protocol Failure”. A protocol failure occurs any time a sending party’s NAESB-EDM server cannot connect to the receiving party’s NAESB EDM server. For example, if a server tries to connect to a server and fails, or tries to post a file and fails, this is a protocol failure.~~
- ~~4.2.xx “Exchange Failure”. An exchange failure is when a sending party’s NAESB EDM server has had continual protocol failures over a thirty-minute period. Each party is required to try at least 3 times over the thirty-minutetwo-hour period before flagging an exchange failure.~~
- 4.2.xx “QEDM”. Quadrant-specific Electronic Delivery Mechanism; the set of standards for each NAESB quadrant that define the business policies, practices and processes for that quadrant related to the use of the Internet ET. The QEDM excludes electronic transport practices and standards. The QEDMs were derived from the Internet EDM from GISB and NAESB WGQ.
- 4.2.xx “Quadrant-Specific Electronic Delivery Mechanism”. See “QEDM”.
- 4.2.xx “Receipt”. The HTTP Response sent from the Receiver to the Sender that includes a timestamp and OK/error status.
- 4.2.xx “Receiver”. The party that receives an electronic package.
- 4.2.xx “Secure Electronic Package”. See “Electronic Package”
- 4.2.xx “Sender”. The party that sends an Electronic Package.
- 4.2.xx “Server”. The computer hardware and software used by the Receiver to receive an Electronic Package from the Sender’s Client. The Server is an HTTP/Web Server.
- 4.2.xx “Web Browser”. See “Browser”
- 4.2.xx “Web Server”. See “HTTP Server”.
- 4.2.xx “QoS”. Quality of Service; term used to define what level of network bandwidth is guaranteed or assured; the Internet does not offer guaranteed quality of service.
- 4.2.xx “Technical Exchange Worksheet” or “TEW”. A worksheet used to communicate important information related to the technical implementation of Internet ET; includes information such as URLs, contacts and key policies.
- 4.2.xx “TCP”. Transmission Control Protocol; IETF RFCs 793, 1122, 1323
See “<http://www.itprc.com/tcpipfaq/default.htm>”
- 4.2.xx “RSA”. A mathematical algorithm for encryption developed by Rivest/Shamir/Adleman.

Formatted: NAESB Para Default 2nd Indent, Space After: 0 pt

Deleted: ¶

Deleted:

Formatted: Space Before: 0 pt

Formatted: Position: Horizontal: Center, Relative to: Margin, Vertical: 0", Relative to: Paragraph, Wrap Around

Deleted: 11/18/2003

Deleted: GMB

Inserted: GMB – D R A F T¶

See <http://world.std.com/~franl/crypto/rsa-guts.html>.

4.2.xx “SSL”. Secure Sockets Layer; a privacy technique that uses encryption to hide information from electronic observers on the Internet.

See “<http://developer.netscape.com/docs/manuals/security/sslin/contents.htm>”

Formatted: Space Before: 0 pt

4.2.xx “PGP”. Pretty Good Privacy; software used to create public and private keys for privacy and digital signature applications; see “<http://www.uk.pgp.net/pgpnet/pgp-faq/>”

4.2.xx “HTTP”. Hypertext transport protocol; Assumes version HTTP/1.1; IETF RFCs 2616, 2069. See “<http://www.w3.org/Protocols/Specs.html>”

4.2.xx “Content-type”. An HTTP header that defines what kind of content is being sent to the browser.

4.2.xx “TP”. Trading partner; any company sending data to or receiving data from another company using Internet ET.

4.2.xx “MIME”. Multipurpose Internet Mail Extensions; IETF RFCs 2045, 2046, 2047, 2048, 2049; See “<http://www.faqs.org/rfcs/rfc2045.html>”

Standards:

4.3.x1 All parties sending and receiving data should accept a TCP/IP connection.

4.3.2 [Not applicable to ET]

4.3.x3 [Not applicable to ET]

4.3.4 Trading partners should retain audit trail data for at least 24 months. This data retention requirement does not otherwise modify statutory, regulatory, or contractual record retention requirements.

4.3.5 [Not applicable to ET]

4.3.6 [Not applicable to ET]

4.3.7 At a minimum, the designated site should be accessible via the public Internet. This specifically does not preclude location of the designated site on a private intranet as long as the designated site is accessible via the public Internet.

4.3.8 The minimum acceptable protocol should be HTTP. All sending and receiving parties should be capable of sending and receiving the HTTP versions supported by NAESB Internet ET.

4.3.9 There is a time stamp (“time-c”) that designates the time that a file is received at the designated site. The receiving party should generate a timestamp upon the successful receipt of a complete file and send an immediate response to the sending party. The timestamp should be generated by the Receiving program of the receiving party, prior to further processing by the Receiving program.

4.3.10 The timestamp should be included in the HTTP Response back to the sender of the original HTTP package. The server clock generating the timestamp should be synchronized with the National Institute of Standards and Technology (NIST) time in order to mitigate discrepancies between the clocks of the sender and receiver.

4.3.x11 The HTTP Response should be sent to the sending Internet Protocol (IP) address.

4.3.12 At a minimum, one designated site for receipt should be identified for each trading partner. That site should be identified by a specific Uniform Resource Locator (URL).

Deleted: x

Deleted: On time stamping, data leaves control of the originator by the same time (deadline), regardless of mechanism (3rd party service provider time stamp is acceptable) and 15 minutes of communication time should be available to allow accumulation of all transactions to the pipeline. A standard network protocol (TCP/IP) should be in service for direct connect to the pipeline designated site by 4/1/97.

Deleted: Originating party is any system originating/creating the document reflecting the transaction to be submitted (this could also include a third-party service provider or a transportation service provider's EBB). Within the 15-minute window the transaction should be received by the receiving party. Errors in transmission shall be governed by the terms and conditions of the trading partner agreement between the parties. The receiving party may also waive the 15-minute window requirement at its own discretion

Deleted: (OPEN ISSUE 033)

Deleted: (OPEN ISSUE 010)

Deleted: Other response documents should be returned to the official designated site defined in the Trading Partner Agreement (OPEN ISSUE 008).

Deleted: s

Deleted: within a trading partner agreement

Deleted: ,

Formatted: Position: Horizontal: Center, Relative to: Margin, Vertical: 0", Relative to: Paragraph, Wrap Around

Deleted: 11/18/2003

This does not preclude multiple designated sites being mutually agreed to between trading partners.

- 4.3.13 The Sender should make three attempts to complete a unit of work. A unit of work consists of one complete HTTP POST transaction as defined in the technical specification of the HTTP protocol (IETF RFC 1945). The roles of sender and receiver are also defined in that document.

4.3.xx A failure to complete a unit of work is a protocol failure.

4.3.xx Three protocol failures within a 30-minute timeframe is an exchange failure.

- 4.3.14 The roles of sender and receiver are defined in the following table. The entire table defines a unit of work:

Client (Sender)	Server (Receiver)	Receiving Program (Receiver)
	Listen for Connect	
Connect	Accept Connection	
Write HTTP Request	Read HTTP Request	Start of Receipt
Write HTTP Request	Read HTTP Request	
EOF (send)	Read HTTP Request	End of Receipt
Read HTTP Response	Write HTTP Response	
Received		
EOF HTTP Response		

- 4.3.15 Trading partners should implement all security features (privacy, secure authentication, integrity, and non-repudiation) using a file-based approach via a commercially available implementation of PGP 6.5 or greater (or compatible with PGP 6.5) or, on a mutually agreed basis, an OpenPGP compatible product.

4.3.xx Trading partners should implement basic authentication.

4.3.xx Encryption keys should be self-certified. The exchange of keys should be done in a secure manner such as via postal mail. Key policies, including key exchange policies should be communicated to trading partners.

4.3.xx Encryption keys should have a limited lifetime whose duration is determined by the key's owner. A key's end of life is expressed in the expiration date field contained in each public key. A lifetime of one year or less is recommended.

- 4.3.16 [Not applicable to ET]
 4.3.17 [Not applicable to ET]
 4.3.18 [Not applicable to ET]
 4.3.19 [Not applicable to ET]
 4.3.20 [Not applicable to ET]
 4.3.21 [Not applicable to ET]
 4.3.22 [Not applicable to ET]
 4.3.23 [Not applicable to ET]

Deleted: GMB

Inserted: GMB – D R A F T

Deleted: (OPEN ISSUE 008)

Deleted: s

Deleted: Internet Engineering Task Force

Deleted: After three failed attempts, it should be considered a failure.

Deleted:

Formatted: Normal

Deleted:

Deleted: also

Deleted:

Deleted: These technologies support all of the above security features while providing independence of choice of Web servers and browsers.

Deleted:

Deleted: and the means of exchange should be specified in the trading partner agreement.

Formatted: Position: Horizontal: Center, Relative to: Margin, Vertical: 0", Relative to: Paragraph, Wrap Around

Deleted: 11/18/2003

- 4.3.24 [Not applicable to ET]
- 4.3.25 [Not applicable to ET]
- 4.3.26 [Not applicable to ET]
- 4.3.27 [Not applicable to ET]
- 4.3.28 [Not applicable to ET]
- 4.3.30 [Not applicable to ET]
- 4.3.31 [Not applicable to ET]
- 4.3.32 [Not applicable to ET]
- 4.3.33 [Not applicable to ET]
- 4.3.34 [Not applicable to ET]
- 4.3.35 [Not applicable to ET]
- 4.3.36 Internet protocols should be used for accessing all industry business functions.
- 4.3.37 Web browser interface should use Internet compatible common browser software.
- 4.3.38 [Not applicable to ET]
- 4.3.39 [Not applicable to ET]
- 4.3.40 [Not applicable to ET]
- 4.3.41 [Not applicable to ET]
- 4.3.42 [Not applicable to ET]
- 4.3.43 [Not applicable to ET]
- 4.3.44 [Not applicable to ET]
- 4.3.45 [Not applicable to ET]
- 4.3.46 [Not applicable to ET]
- 4.3.47 [Not applicable to ET]
- 4.3.48 [Not applicable to ET]
- 4.3.49 [Not applicable to ET]
- 4.3.50 [Not applicable to ET]
- 4.3.51 [Not applicable to ET]
- 4.3.52 [Not applicable to ET]
- 4.3.53 [Not applicable to ET]
- 4.3.54 [Not applicable to ET]
- 4.3.55 [Not applicable to ET]
- 4.3.x56 The industry should use common codes for legal entities when using Internet ET.
- 4.3.57 [Not applicable to ET]
- 4.3.58 [Not applicable to ET]

Formatted: Position: Horizontal:
Center, Relative to: Margin, Vertical:
0", Relative to: Paragraph, Wrap
Around

Deleted: 11/18/2003

Deleted: GMB

Inserted: GMB – D R A F T¶

4.3.59 [Not applicable to ET]

4.3.60 [Not applicable to ET]

4.3.61 [Not applicable to ET]

4.3.62 [Not applicable to ET]

4.3.63 [Not applicable to ET]

4.3.64 Private network connections to NAESB Internet ET servers, which include all NAESB Internet ET standardized Internet communication, may be at any point on a party's firewall boundary at the party's discretion on a non-discriminatory access basis. The specific type and speed of these connections should be mutually agreed. It is at the discretion of each party on how multiple private network connections should be managed, so long as such management is done on a non-discriminatory access basis.

Deleted: Web sites

4.3.65 [Not applicable to ET]

4.3.66 [Not applicable to ET]

4.3.67 [Not applicable to ET]

4.3.68 [Not applicable to ET]

4.3.69 [Not applicable to ET]

4.3.70 Parties should be limited to the NAESB Internet ET approved list of available TCP ports for Internet ET implementations.

Deleted: and UDP ports

Deleted: included in Appendix E of the Internet ET Standards Manual

Deleted: (OPEN ISSUE 009)

4.3.71 Internet ET implementations should not require any inbound ports to be opened on the client-side firewall.

4.3.72 [Not applicable to ET]

4.3.73 [Not applicable to ET]

4.3.74 [Not applicable to ET]

4.3.75 [Not applicable to ET]

4.3.76 [Not applicable to ET]

4.3.77 [Deleted]

4.3.78 [Not Applicable to ET]

4.3.79 [Not Applicable to ET]

4.3.80 [Not Applicable to ET]

4.3.81 [Not Applicable to ET]

4.3.82 [Not Applicable to ET]

4.3.83 [Not Applicable to ET]

4.3.84 [Not Applicable to ET]

4.3.85 [Not Applicable to ET]

4.3.86 [Not Applicable to ET]

4.3.87 [Not Applicable to ET]

4.3.88 For Internet ET, 128-bit Secure Socket Layer (SSL) encryption should be used.

Formatted: Position: Horizontal: Center, Relative to: Margin, Vertical: 0", Relative to: Paragraph, Wrap Around

Deleted: 11/18/2003

Deleted: GMB
Inserted: GMB – D R A F T¶

D. Interpretations

NAESB has adopted the following interpretations of standards that relate to Internet ET implementation:

Deleted: NAESB REQ
Deleted: Electronic Delivery Mechanism Related Standards
Deleted: [NONE TO DATE]¶

- 7.3.24 [Not applicable to ET]
- 7.3.35 [Not applicable to ET]

Formatted: Position: Horizontal: Center, Relative to: Margin, Vertical: 0", Relative to: Paragraph, Wrap Around
Deleted: 11/18/2003

Deleted: GMB

Inserted: GMB – DRAFT¶

5 – RELATED STANDARDS

Common Codes

Internet ET uses the D-U-N-S® Number as the common company identifier for the HTTP Request and Response data dictionary 'to' and 'from' HTTP header elements. The D-U-N-S® Number is a 9-digit number assigned to companies by the Dun & Bradstreet Corporation (D&B). The D-U-N-S+4® Number is a 10- to 13-digit number, where characters 10 through 13 are arbitrarily assigned by the owner of the D-U-N-S® Number.

For Internet ET Common Code purposes, an entity will use one and only one D-U-N-S® Number. Entity common codes should be "legal entities," that is, Ultimate Location, Headquarters Location, and/or Single Location (in D&B terms). However, in the following situations, a Branch Location (in D&B terms) can also be an entity common code:

1. When the contracting party provides a D-U-N-S® Number at the Branch Location level.
2. To accommodate accounting for an entity that is identified at the Branch Location level.

Since D&B offers customers the option of carrying more than one D-U-N-S® Number per entity, please refer to NAESB's Web Page at www.naesb.org for directions on determining the one and only one D-U-N-S® Number constituting the NAESB Internet ET Entity Common Code.

Party Roles

In the Internet ET, multiple parties are involved in the exchange, including distribution companies, end-users, regulatory entities, service providers, and suppliers. See the [glossary](#) (OPEN ISSUE 022)

JETF EDIINT AS2 - CLB

Deleted: In keeping with the trends in other industries involved with EDI, REQ TEIS recommends the acceptance of

Deleted: a

Deleted: (OPEN ISSUE 001)

Deleted: Similarly, NAESB fully endorsed the use of the D-U-N-S® Number common code.

Deleted: NAESB

Deleted: REQ

Deleted: REQ

Deleted: (OPEN ISSUE 001, OPEN ISSUE 021)

Deleted: all of the transaction sets, there are

Deleted: that may be

Deleted: transaction

Deleted: . There are

Deleted: ANSI ASC X12 Standards¶

¶ The NAESB REQ standards reflect an industry utilization of the American National Standards Institute (ANSI) ASC X12 standards maintained by the Data Interchange Standards Association, Inc. (DISA). It is recommended that any industry participant who wishes to utilize the ANSI ASC X12 standards should also have a copy of the ANSI ASC X12 Standards Reference document for a full understanding of the X12 requirements. NAESB members may purchase an ANSI reference document through NAESB by contacting the NAESB office. Non-NAESB industry participants may purchase the reference document by contacting:¶

¶ Manager of Publications¶
DISA¶
333 John Carlyle Street, Suite 600¶
Alexandria, VA 22314¶
Voice: 703-548-7005¶
Fax: 703-548-5738¶
www.disa.org¶

¶ As a member of ANSI, NAESB REQ will utilize the ANSI ASC X12 standards and remain in full compliance. In all standards, occasions arise where the standard does not fully meet a need. NAESB REQ ... [5]

Formatted ... [6]

Deleted: 11/18/2003

6 – TECHNICAL IMPLEMENTATION - INTERNET ET

INTERNET ET TECHNOLOGIES

The NAESB Internet ET uses the following technologies and components to securely and reliably transport electronic packages to trading partners:

- PGP and OpenPGP Encryption and Digital signatures
- TCP/IP and HTTP POST. Internet ET uses a specifically-structured HTTP POST to transport payload data from one trading partner to the other.
- Mime multi-part encoding. Internet ET package structure requires that each section of the package be encoded.
- A “Browser”, running at the Sender’s site as Client software. This software is referred to in this document as “Client”.
- A “Server” running at the Receiver’s site, usually on a dedicated computer. This is a Web or HTTP server, and is referred to in this document as “Server”.

Formatted: Position: Horizontal: Center, Relative to: Margin, Vertical: 0", Relative to: Paragraph, Wrap Around

Deleted: 11/18/2003

12/11/2003

ELECTRONIC TRANSPORT LIFE CYCLE

The life cycle of an Electronic Package using Internet ET is described below:

Sender		Receiver
- Collects payload data to be sent - Encrypts payload - Prepares digital signature if necessary		
- Uses browser to create Electronic Package multipart HTTP Request with header data elements and payload. - Uses HTTP POST to send the electronic package to the Receiver	↓	
		- Receives the HTTP Request on their Web/HTTP Server - Validates Sender information from HTTP Request Header data elements and payload **Decrypts payload file - Prepares Receipt - Checks digital signatures if necessary
	↙	Sends Receipt with either "OK" or error message
- Updates logs - If errors, correct errors then repeat process		**Decrypts payload file
	↙	If errors in decryption, sends Error Notification to Sender
- Receives Error Notification - Updates logs - correct errors then repeat process		- Updates logs - If no errors, Receiver processes contents of payload


**Parties may choose to decrypt file before or after Receipt is sent to Sender.

Formatted: Position: Horizontal: Center, Relative to: Margin, Vertical: 0", Relative to: Paragraph, Wrap Around

Deleted: 11/18/2003

Batch Flow Diagram

The flow of data to and from trading partners in an automated environment is diagrammed below.

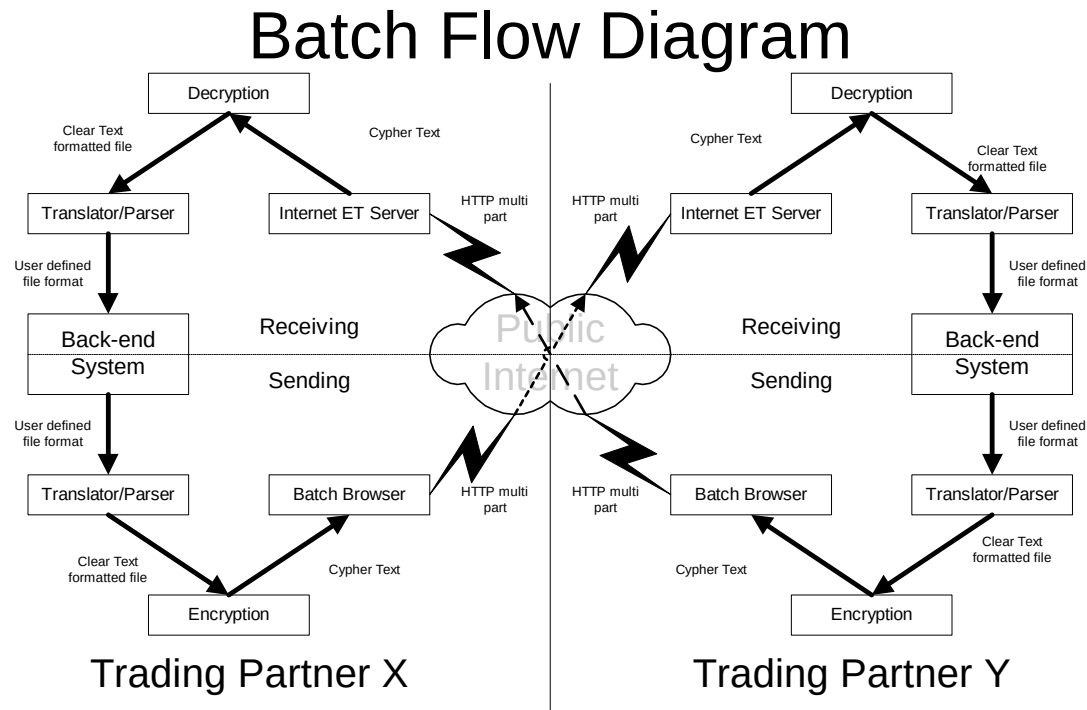

ANATOMY OF AN INTERNET ET PACKAGE

An Internet ET package consists of the following sections:

- Envelope header. This section contains the envelope information needed to communicate who the Sender and Receiver are, as well as other envelope information.
- Payload. This section contains the payload file. Internet ET allows for only one payload file per package.
- Digital Signatures. If used, the package should contain a section that is the digital signature.

Deleted: –

Deleted: –

Deleted: –

ENVELOPE DATA DICTIONARY

The data dictionary on the next page details standard data elements, each with element name

Formatted: Position: Horizontal: Center, Relative to: Margin, Vertical: 0", Relative to: Paragraph, Wrap Around

Deleted: 11/18/2003

and description.

Data Dictionary for Internet ET

Business Name	Definition	Format	Usage*	Condition
from**	the party sending the transaction	Common Code Identifier format	in Request; M	used in file transmittal; displayed in HTTP Response; and, used in posting back decryption-related errors
input-data	the filename for the transaction data set transmitted	including drive letter and directory name with filename if needed	in Request; M	used in file transmittal of any transaction data sets; and, used for posting back all transaction value pairs for a transmittal that had decryption-related errors.
input-format	descriptor of the data format used for the file transmitted	as defined by QEDM	in Request; M	NAESB standard format indicator used in file transmittal
receipt-disposition-to	the party to receive receipts, the value should be the same as the "from"	Common Code Identifier format	in Request; M	used in file transmittal and in posting error notifications
receipt-report-type	type of receipt type being requested by sender	gisb-acknowledgement-receipt	in Request; M	used in file transmittal and in posting error notifications
receipt-security-selection	used to request signed receipts	signed-receipt-protocol=required,pgp-signature;signed-receipt-micalg=required,md5	in Request; MA	used in file transmittal and in posting error notifications
refnum	used by the party to assign a unique message identifier for tracing purposes	maximum 40 character integer value	in Request; MA	May be used by sender to send tracking information to a recipient. Use of this data element is by mutually agreed. This data element is conceptually similar to a Message-ID filed within RFC 822.
request-status	status describing success or failure of transmission at recipient Server	ok; EEDM###:error description; WEDM###:warning description. see Table A, "Internet EDM Standard Error Codes and Messages"	in Response; M	"ok" is returned if all is fine with processing; error messages/warnings and their related descriptions are returned if problems were encountered in processing.
server-id	uniquely identifies the Server processing the transaction	domainname or hostname.domainname; no embedded spaces allowed	in Response; M	displayed in the HTTP Response and posted back for any decryption-related errors

Deleted: X12 ;XML:error

Deleted: "X12", "XML", or other

Deleted: ; "error" used in posting back any decryption-related errors

Deleted: (OPEN ISSUE 002)

Formatted: Position: Horizontal: Center, Relative to: Margin, Vertical: 0", Relative to: Paragraph, Wrap Around

Deleted: 11/18/2003

Deleted: GMB

Inserted: GMB – D R A F T¶

Business Name	Definition	Format	Usage*	Condition
time-c	the time file transfer is complete at the Server	yyyymmddhhmmss	in Response; M	displayed in the HTTP Response and posted back for any decryption-related errors; <u>refer to QEDM for quadrant-specific use</u>
<u>time-c-qualifier</u>	<u>delta from UTC (ref ISO 8601)</u>	<u>-ZZ; +ZZ</u>	<u>in Response; MA</u>	<u>displayed in the HTTP Response and posted back for any decryption-related errors; refer to QEDM for quadrant-specific use</u>
to **	the party the transaction was sent to	Common Code Identifier format	in Request; M	used in file transmittal and displayed in HTTP Response and posted back for any decryption-related errors
transaction-set	name of the document type being sent	8 character code; refer to NAESB REQ Implementation Guide, Related Standards Tab, Hypertext Transfer Protocol (HTTP) section, HTTP transaction-set Code Values table.	in Request; MA	used in file transmittal
trans-id	sequential number assigned to the transaction by the Server upon processing before being passed to the decryption process	integer up to 15 characters in length	in Response; M	displayed in the HTTP Response and posted back for any decryption-related errors
version	the NAESB Internet ET version being used by the sender	numeric, decimal notation (e.g. 1.6)	in Request; M	used in file transmittal and in posting error notifications

Deleted: -ZZ;¶
yyyymmddhhmmss+ZZ¶
(OPEN ISSUE 010)

Deleted: , where + or -ZZ indicates delta from UTC (ref ISO 8601)

Deleted: (OPEN ISSUE 001)

Deleted: (OPEN ISSUE 003)

*The **Usage** column defines whether the element appears in the HTTP Request (Client-generated) or the HTTP Response (Server-generated), the order in which the element appears in the data stream, and whether the field is Mandatory (M) or Mutually-Agreed-To (MA).

** Common Code Identifier

Formatted: Position: Horizontal: Center, Relative to: Margin, Vertical: 0", Relative to: Paragraph, Wrap Around

Deleted: 11/18/2003

SENDING INTERNET ET PACKAGES

General Flow

The following is an example of the steps necessary to send an Internet ET package:

1. Open HTTP connection
2. Check connection status. If in error, re-queue package according to Internet ET standards. This check should be performed here and throughout the following processes.
3. Post, including a) Authentication, b) Send multipart form, c) Receive HTTP Response data
4. Check connection status. If in error re-queue package according to Internet ET standards
5. Check HTTP status code (200 is good, less than 300 may be acceptable). If status is not successful re-queue package according to Internet ET standards
6. Close connection - wait for other end to close in a reasonable time
7. Parse HTTP Response data elements
8. If request-status ok, then log success
9. If request-status error, then log error
10. If no valid request-status re-queue package according to Internet ET standards
11. Remove package from sending queue when successful or when failed completely

If trading partners agree to implement signed receipts, then the sending party must include the "receipt-security-selection" data element in the posted data. The receiving party must digitally sign the "gisb-acknowledgement-receipt" and encapsulate the "gisb-acknowledgement-receipt" and digital signature body parts within a MIME envelope with a "content-type" of application/pgp-signature.

Deleted: (OPEN ISSUE 002)

Deleted: (OPEN ISSUE 002)

Using an Interactive Browser for Internet ET

Electronic packages can be uploaded to a trading partner using an interactive browser secured using SSL 128-bit encryption. Sending electronic packages via an interactive browser is ideal for a small volume of package transfers, or as a back-up method to any batch or automated process.

To use an interactive browser to upload data, an HTML document must be created with an HTML <FORM> element that allows the Sender to type in any necessary data elements, such as "to", "from", "input-format", and the name of the file to be uploaded. When the user submits the form, an HTTP POST is sent to the Server with the package, which includes the uploaded file and the required data elements.

The following example is an HTML document with a form that specifies the POST method and contains the required data elements. This type of HTML form could be used with any browser that supports multipart POST with a file upload.

EXAMPLE: HTML DOCUMENT WITH A FORM FOR MULTIPART POST USING AN INTERACTIVE BROWSER:

```
<HTML><HEAD><TITLE>NAESB Internet ET Package Upload</TITLE>
<H1><CENTER>NAESB Internet ET Package Upload</CENTER></H1>
</HEAD>
<BODY><HR>
<FORM ENCTYPE="multipart/form-data" ACTION="http://www.target.server/cgi-bin/upload.exe"
```

Formatted: Position: Horizontal: Center, Relative to: Margin, Vertical: 0", Relative to: Paragraph, Wrap Around

Deleted: 11/18/2003

Deleted: GMB

Inserted: GMB – D R A F T

```

METHOD="POST">
Enter Common Code Identifier for From and To:
From: <INPUT TYPE="text" NAME="from" SIZE=20 VALUE=""><br>
To: <INPUT TYPE="text" NAME="to" SIZE=20 VALUE=""><br>
NAESB Internet ET Version: <INPUT TYPE="text" NAME="version" SIZE=5 VALUE="1.6"><br>
Deliver Receipt To: <INPUT TYPE="text" NAME="report-disposition-to" SIZE=20 VALUE=""><br>
Receipt Type: <INPUT TYPE="text" NAME="receipt-report-type" SIZE=30
VALUE="gisb-acknowledgement-receipt"><br>

IF requesting signed receipts also include: Receipt Type: <INPUT TYPE="text" NAME="receipt-security-selection"
SIZE=30 VALUE="signed-receipt-protocol=required, pgp-signature; signed-receipt-micalg=required, md5"><br>

Format of this file: <INPUT TYPE="text" NAME="input-format" SIZE=6 VALUE="X12"><br>
Send this file: <INPUT NAME="input-data" TYPE="FILE"><br>
<INPUT TYPE="submit" VALUE="Send File"><br>
</FORM></BODY></HTML>

```

Deleted: (OPEN ISSUE 002)

Inserted: (OPEN ISSUE 002)

The important characteristics of the form within the HTML document are:

- ENCTYPE= specifies the encoding type. The "multipart/form-data" encoding type is identified as the standard encoding methodology.
- ACTION= specifies the URL that will receive the uploaded data. The [TEW or TPA](#) identifies the URLs for both parties.
- METHOD= specifies the HTTP protocol method. "POST" has been defined as the Internet ET standard method.
- <INPUT ...>. HTML INPUT elements include the required data elements such as "from", "to", and "input-format". Refer to the data dictionary for the complete list of required data elements.

Deleted: Trading Partner Agreement (TPA) (OPEN ISSUE 008)

When a user selects the "Send File" button, the interactive browser will take the values entered in the input fields and reformat them into a data stream, formatted according to the encoding type. The file identified for upload is opened and its contents are included in the data stream. The data stream is then sent to the URL specified by "**ACTION=**", which indicates a Server Receiving script or program written to receive the package.

Using a Batch Browser for Internet ET

A batch browser is used by companies that want to automate their transport processes and/or prefer to minimize human involvement. A batch browser is initiated by a program or a script.

A batch browser can be created via custom programming. A batch browser is coded to perform the same formatting as an interactive browser, formatting a data stream that conforms to the HTTP and Internet ET protocols. A batch browser must be coded as a "TCP sockets" program. See the section "Writing a Batch Browser".

Authentication

??[GPD to research] Prior to NAESB WGQ EDM v1.6, userids and passwords had to be encoded using base64-encoded tools. NAESB WGQ EDM v1.6 requires use of SSL to encrypt this information. As a result, base64 encoding is no longer necessary.

HTTP basic authentication includes a "userid" and "password". Interactive browsers include a basic authentication feature that automatically prompts for "userid" and "password". In a batch

Formatted: Position: Horizontal: Center, Relative to: Margin, Vertical: 0", Relative to: Paragraph, Wrap Around

Deleted: 11/18/2003

Deleted: GMB

Inserted: GMB – D R A F T¶

browser, the authentication must be specifically coded. The “userid” and “password” are to be base64-encoded within the document header. Base64-encoding utilities are readily available on the Internet as either public domain software or commercial libraries.

Server Response

The Server will send a “gisb-acknowledgement-receipt” as an HTTP Response to the Client before dropping the Client’s connection. If the transacting parties agree to use signed receipts, then the Server applies a digital signature to the “gisb-acknowledgement-receipt” and encapsulates the entire package in a MIME envelope of “content-type: application/pgp-signature”.

Deleted: (OPEN ISSUE 002)

Deleted: (OPEN ISSUE 002)

The “gisb-acknowledgement-receipt” returned from the Server contains the “time-c” and the “time-c-qualifier” (where applicable) Receipt timestamps that are recorded when the final byte from the package upload is received and stored. This Receipt timestamp is the official timestamp regarding transaction turnaround deadlines as defined in Internet ET and QEDM standards. This timestamp and all other pertinent package transmittal information should be logged by the receiver when the posted package is stored on the Server, and logged by the Client. Likewise, any errors or warnings should be logged at both the Client and Server.

Formatted: NAESB Para Default
Char Char Char Char

Deleted: ¶
Page Break

Inserted: Page Break

Sender HTTP Request Data Elements

The HTTP Request will provide all required data elements in the ORDER DEFINED BELOW. Any “mutually-agreed-upon” data elements will follow the required data elements in the data stream. Refer to the section “Data Dictionary for Internet ET” for descriptions of these data elements.

Required Data Elements, Listed in the Required Order:

1. from
2. to
3. version
4. receipt-disposition-to
5. receipt-report-type
6. input-format
7. input-data

Mutually Agreed Upon Data Elements

- transaction-set
- receipt-security-selection

??BKW: check deleted descriptions against data dictionary

Writing a Batch Browser

A batch browser Client needs to simulate the actions of an interactive browser Client. As stated earlier, the interactive browser Client will take the HTML form, reformat the information according to the HTTP protocol, then send the data stream to the Server. The reformatting adds a header and places field delimiters around the data items.

A batch browser needs to produce the same kind of data stream and, therefore, writing a batch browser requires some specific knowledge of the HTTP protocol.

Formatted: Position: Horizontal:
Center, Relative to: Margin, Vertical:
0", Relative to: Paragraph, Wrap
Around

Deleted: 11/18/2003

Deleted: GMB

Inserted: GMB – ~~D R A F T~~

EXAMPLE: A TYPICAL HEADER SENT TO THE SERVER

```
POST /cgi-bin/AS2dispatcher HTTP/1.1
Referer: http://www.get.a.life/upl.htm
Connection: Keep-Alive
User-Agent: brow v0.1 XYZ Corp.
Host: localhost
Accept: image/gif, image/x-bitmap, image/jpeg, image/pjpeg, */*
content-type: multipart/form-data; boundary=-----87453838942833
Content-Length: 5379
```

Deleted: Content-type

POST Line - In the example above, the first line indicates the POST method was used and identifies which Receiving program to call:

```
POST /cgi-bin/AS2dispatcher HTTP/1.1
```

Content Type - The “content-type” line indicates that the encoding method is multipart, and identifies the character string used as the boundary.

```
content-type: multipart/form-data; boundary=-----87453838942833
```

Deleted: Content-type

Boundary String - The “boundary=” identifies the string that will appear between each field as a delimiter. In this example, the boundary is comprised of 27 hyphen characters followed by a number.

```
content-type: multipart/form-data; boundary=-----87453838942833
```

Deleted: Content-type

The boundary can be ANY character string that you choose. The string used CANNOT OCCUR ANYWHERE ELSE IN THE PACKAGE BEING SENT. This is usually accomplished by using either the system clock or a random number so that even if by some remote chance the string appears in the document it would not appear in any re-transmission of the file. It is strongly recommended that a relatively long string be used as a boundary.

The boundary string, when used as a separator, REQUIRES TWO HYPHEN CHARACTERS APPENDED TO THE FRONT of the string. The LAST boundary required in the form is TWO HYPHEN CHARACTERS APPENDED TO THE BACK of the separator boundary, used to indicate to the Server program that this is the end of the data.

```
-----87453838942833--
```

Content Length - The “content-length” value should match the number of bytes contained in the entity body including the characters in the boundary lines, variable content, blank lines, etc. “content-length” indicates to the Server how much data are going to come after this point. In the example above, the content length is:

```
Content-Length: 5379
```

Deleted: -

Envelope / Required Data Elements - The envelope information for the package (“to”, “from”, etc) is included in a series of boundaries that include the “content-disposition” and “name=” qualifiers, followed by the data element value. The example below includes the “from” field as “123456789” and the “to” field as “234567890”.

```
-----87453838942833
content-disposition: form-data; name="from"

123456789
-----87453838942833
content-disposition: form-data; name="to"

234567890
```

Formatted: Position: Horizontal: Center, Relative to: Margin, Vertical: 0", Relative to: Paragraph, Wrap Around

Deleted: 11/18/2003

The “content-disposition” identifier defines that “form-data” is contained in the element. The

"name=" identifier defines the name of the data element. These data element names must match the name specified by Internet ET Data Dictionary. The "name=" identifier is not completely relevant since the fields should be present in the correct order, but this field should be checked to verify the validity of the form content.

The actual data value of the field is always preceded by a blank line. This is typically used as a marker for the Server program to indicate that a data value will follow. For example, note the blank line preceding "X12" in the example. In most programming libraries and commercial products the starting delimiter is "\r\n\r\n" (C notation).

```
-----87453838942833
content-disposition: form-data; name="version"

1.64
-----87453838942833
content-disposition: form-data; name="receipt-disposition-to"

123456789)
-----87453838942833
content-disposition: form-data; name="receipt-report-type"

gisb-acknowledgement-receipt
-----87453838942833
content-disposition: form-data; name="input-format"

x12
```

Deleted: (OPEN ISSUE 002)

Payload. The content or 'payload' (EDI, etc) is encrypted and included in its own boundary section.

The data field containing the Internet ET payload file has two extra identifiers. The "filename=" element indicates the name of the file sent from the sender/client computer. In the example the name of the file is "c:\temp\smallnom.bin".

```
content-disposition: form-data; name="input-data"; filename="c:\temp\smallnom.bin"
```

The "content-type" element indicates the type of the data being transmitted according to accepted Internet standards.

```
content-type: multipart/encrypted; boundary=--boundary2--200309090001; protocol="application/pgp-encrypted"
```

Note that encrypted files can be multipart also, which means they will have their own boundary string.

```
-----87453838942833
content-disposition: form-data; name="input-data"; filename="c:\temp\smallnom.bin"
content-type: multipart/encrypted; boundary=--boundary2--200309090001; protocol="application/pgp-encrypted"

----boundary2--200309090001
content-type: application/pgp-encrypted

Version: 1

----boundary2--200309090001
content-type: application/octet-stream

-----BEGIN PGP MESSAGE-----
Version: PGP 6.5

hQCMaZRG1pEOIOvdAQP+JMr0m/9+8yOL60Z9Vr6fFV81FCExB/o0xmwiMkiwYsHsz0e8sb7ErC340MrNA/dw3taGMjmI
+CXyRF/PLEdg1NZE1ZCtNeL4YdiHAMLWwODGIQxhSucz8rMSgQ5mZzcOJwBdWLW70efgsu/9UljUJjYc1uZ6C03eFQv/4
3fkB+alATgydxX4g8QK664ad+Jo/XUICSmWBL66fqJR1KLeL4wTaqGy174Aq48Wpwwg1Eh785zC03UAW0qg0ugMt86dPe
```

Deleted: –

Deleted: important

Deleted: electronic data

Deleted: that

Deleted: being packaged and sent is

Formatted: Position: Horizontal:
Center, Relative to: Margin, Vertical:
0", Relative to: Paragraph, Wrap
Around

Deleted: 11/18/2003

Deleted: GMB

Inserted: GMB – D R A F T¶

```
yd91e2JigqwDYEf/DYEKD0J9BGiGpS/uAupNKj8Ocp2IWClxKOGUbxpVNOntqWHS/GntegvDE/7/ewCxDxsnmQS95pOI1
41QZ1RqbeNaqx2Dq/ra9g65HNchOCzjul5Vi8HHf6Yhg2WnROe+npByyCue6rihggNVOJwj0Cvzpb4JE+gMDf3q4ISUb1Fv7
/+SSFHDdnhdC5YTpqf1Bc3B07hiLmtTXqNit31EbX9UVEIObzSa9ZhxbC6/eSl7Nuf5ZTDsh9nrk+QQJ6FeC9W4cqXLj7IZyS
aRO8Vtff+4ktqeuHusT4kSpnk027aw4O/5jomUkfb22CAe4=
=Oiuo
-----END PGP MESSAGE-----
-----boundary2--200309090001--
```

Boundary String Terminators - Each multipart stream must be terminated with the boundary string terminator. After the contents of the last data field, the boundary string and the required two-hyphen terminator indicate the end of the multipart encrypted payload:

```
-----boundary2--200309090001--
```

A second boundary terminator string indicates the end of the package:

```
-----87453838942833--
```

Examples

EXAMPLE: AN X12 EDI DATA STREAM BEFORE ENCRYPTION:

content-type: application/EDI-X12

Deleted: Content-type

```
ISA~00~ ~01~AAA6300300~14~1234567890000 ~14~2345678900000
... more data from the X12 file...
IEA~1~000003616
```

EXAMPLE: THE SAME X12 EDI ENCRYPTED WITH PGP

```
content-type: multipart/encrypted; boundary=--boundary2--200309090001; protocol="application/pgp-encrypted"
-----boundary2--200309090001
content-type: application/pgp-encrypted
Version: 1
-----boundary2--200309090001
content-type: application/octet-stream
-----BEGIN PGP MESSAGE-----
Version: PGP 6.5
hQCMaZRG1pEOIOvdAQP+JMr0m/9+8yOL60Z9Vr6fFV81FCExB/o0xmwiMkiwYsHsz0e8sb7Er340MrNA/dw3taGMjmI+
CXYRF/PLEdg1NZE1ZCtNeL4YdIHAMLWwODG!QxhSucz8rMSgQ5mZzcOJwBdWLW70efgsu/9UljuJjYc1uZ6C03eFQv/43f
kB+alAtgydxX4g8QK664ad+Jo/XUICSmWBL66fqJR1KLeL4wTaqGy174Aq48Wpwwg1Eh785zC03UAW0qg0ugMt86dPeyd
91e2JigqwDYEf/DYEKD0J9BGiGpS/uAupNKj8Ocp2IWClxKOGUbxpVNOntqWHS/GntegvDE/7/ewCxDxsnmQS95pOI141
QZ1RQbeNaqx2Dq/ra9g65HNchOCzjul5Vi8HHf6Yhg2WnROe+npByyCue6rihggNVOJwj0Cvzpb4JE+gMDf3q4ISUb1Fv7/
+SSFHDdnhdC5YTpqf1Bc3B07hiLmtTXqNit31EbX9.UVEIObzSa9ZhxbC6/eSl7Nuf5ZTDsh9nrk+QQJ6FeC9W4cqXLj7IZyS
aRO8Vtff+4ktqeuHusT4kSpnk027aw4O/5jomUkfb22CAe4=
=Oiuo
-----END PGP MESSAGE-----
-----boundary2--200309090001--
```

Formatted: Position: Horizontal: Center, Relative to: Margin, Vertical: 0", Relative to: Paragraph, Wrap Around

Deleted: 11/18/2003

EXAMPLE: A COMPLETE ELECTRONIC PACKAGE DATA STREAM

```
POST /cgi-bin/AS2dispatcher HTTP/1.1
Referer: http://www.get.a.life/upl.htm
Connection: Keep-Alive
User-Agent: brow v0.1 XYZ Corp.
Host: localhost
Accept: image/gif, image/x-bitmap, image/jpeg, image/pjpeg, */*
Content-type: multipart/form-data; boundary=-----87453838942833
Content-Length: 5379

-----87453838942833
content-disposition: form-data; name="from"

123456789
-----87453838942833
content-disposition: form-data; name="to"

234567890
-----87453838942833
content-disposition: form-data; name="version"

1.46
-----87453838942833
content-disposition: form-data; name="receipt-disposition-to"

123456789
-----87453838942833
content-disposition: form-data; name="receipt-report-type"

gisb-acknowledgement-receipt
-----87453838942833
content-disposition: form-data; name="input-format"

X12
-----87453838942833
content-disposition: form-data; name="input-data"; filename="c:\temp\smallnom.bin"
content-type: multipart/encrypted; boundary=--boundary2--200309090001; protocol="application/pgp-encrypted"

----boundary2--200309090001
content-type: application/pgp-encrypted

Version: 1

----boundary2--200309090001
content-type: application/octet-stream

-----BEGIN PGP MESSAGE-----
Version: PGP 6.5

hQCMaZRG1pEOIOvdAQP+JMr0m/9+8yOL60Z9Vr6fFV81FCExB/o0xmwiMkiwYsHsz0e8sb7ErC340MrNA/dw3taGMjmI
+CYRF/PLEdg1NZE1ZCtNeL4YdIHAMLWwODGIQxhSucz8rMSgQ5mZzcOJwBdWLW70efgsu/9UljUJjYc1uZ6C03eFQv/4
3fKB+alATtydxX4g8QK664ad+Jo/XUICSmWBL66fqJR1KLeLf4wTaqGy174Aq48Wpwwg1Eh785zC03UAW0qg0ugMt86dPe
yd91e2JigqwDYEf/DYEKD0J9BGiGpS/uAupNKj8Ocp2IWCLxKOGUbxpVNOntqWHS/GntegvDE/7/ewCxXsnmQS95pOI1
41QZ1RqbeNaqx2Dq/ra9g65HNchOCzjul5Vi8HHf6Yhg2WnROe+npByyCue6rihqgNVOJwj0cVzpb4JE+gMDf3q4ISUb1Fv7
/+SSFHDDnhdC5YTpqf1Bc3B07hiLmtTXqNit31EbX9UVEIObzSa9ZhxbC6/eSl7Nuf5ZTDsh9nrk+QQJ6FeC9W4cqXLj7IZyS
aRO8Vtff+4ktqeuHusT4kSpnk027aw4O/5jomUkfb22CAe4=
=Oiuo
-----END PGP MESSAGE-----
----boundary2--200309090001--
-----87453838942833--
```

Deleted: Content-type

Deleted: (OPEN ISSUE 002)

Formatted: Position: Horizontal:
Center, Relative to: Margin, Vertical:
0", Relative to: Paragraph, Wrap
Around

Deleted: 11/18/2003

RECEIVING INTERNET ET PACKAGES

General Flow

The following is an example of the steps necessary to receive an Internet ET package:

1. Parse multi-part form
2. Validate HTTP Request data elements
3. If HTTP Request data elements in error, return appropriate Internet ET standard error code in the HTTP Response data elements
4. Save data
5. Create "gisb-acknowledgement-receipt"
6. If using signed receipts, produce a digital signature over the "gisb-acknowledgement-receipt" created in step 5.
7. Encapsulate the "gisb-acknowledgement-receipt" and digital signature body parts in a "Content-Type" of "multipart/signed envelope"
8. Return HTTP Response with the "gisb-acknowledgement-receipt" object back to Client
9. Close connection
10. Log final results
11. Route data file to the next process based upon "input-format"

Deleted: (OPEN ISSUE 002)

Deleted: P

Deleted: (OPEN ISSUE 002)

Deleted: (OPEN ISSUE 002)

Deleted: (OPEN ISSUE 002)

Overview of Web Server Receiving Programs

The Web Server receives the POST and calls the appropriate Receiving script or program to:

- parse the incoming HTTP Request
- create the receipt timestamp using the current date and time
- create an HTML Response to the Client

An Internet ET Receiving program may be implemented using a variety of technologies and techniques, including Active Server Pages (ASP), Common Gateway Interface (CGI), Java Server Pages (JSP), Java Servlets, and Personal Home Pages (PHP). The Internet ET is supported by most commercially available Web/HTTP servers.

The Receiving Program and Process

The Receiving program must be able to parse the multi-part form. It accomplishes this by finding the boundary string in the "content-type" header and scanning for its occurrences further within the uploaded stream. Upon finding these boundary strings, the program must next determine the "content-disposition" for each data element. This allows detection of the required text elements as well as the Internet ET payload file.

The Receiving program only stores the payload file and is not concerned with the content of the payload file, which is encrypted. It will use the "content-length" to determine how much data to expect in the body of the package.

A Receiving process requires an executable program or module that is called by the Server when it is identified by a POST operation.

When the Server receives a POST it will first read the header and populate environment variables before calling the Receiving program. Most HTTP servers read header variables and populate environment variables. Check your HTTP server documentation for more information.

Formatted: Position: Horizontal: Center, Relative to: Margin, Vertical: 0", Relative to: Paragraph, Wrap Around

Deleted: 11/18/2003

Deleted: GMB

Inserted: GMB – D R A F T

EXAMPLE: A SAMPLE HTTP POST HEADER

```
POST /cgi-bin/AS2dispatcher HTTP/1.1
Referer: http://www.get.a.life/upl.htm
Connection: Keep-Alive
User-Agent: brow v0.1 XYZ Corp.
Host: localhost
Accept: image/gif, image/x-bitmap, image/jpeg, image/pjpeg, */*
content-type: multipart/form-data; boundary=-----87453838942833
Content-Length: 5379
```

Deleted: Content-type

After reading the HTTP header information, the Server will buffer the remaining data transmitted and call the Receiving program specified in the POST statement. Do not assume that the Receiving program is called as soon as the header is read, which can impact your receipt timestamp. The more common implementations buffer the entire transmission before calling the program. Check your server implementation if this characteristic is important to you.

The Receiving program will have the following data stream available, and will have most of the header data available in environment variables.

EXAMPLE: DATA STREAM AVAILABLE TO RECEIVING PROGRAM

```
-----87453838942833
content-disposition: form-data; name="from"
123456789
-----87453838942833
content-disposition: form-data; name="to"
234567890
-----87453838942833
content-disposition: form-data; name="version"
1.64
-----87453838942833
content-disposition: form-data; name="receipt-disposition-to"
123456789
-----87453838942833
content-disposition: form-data; name="receipt-report-type"
gisb-acknowledgement-receipt
-----87453838942833
content-disposition: form-data; name="input-format"
X12
-----87453838942833
content-disposition: form-data; name="input-data"; filename="c:\temp\smallnom.bin"
content-type: multipart/encrypted; boundary=--boundary2--200309090001; protocol="application/pgp-encrypted"
----boundary2--200309090001
content-type: application/pgp-encrypted
Version: 1
----boundary2--200309090001
content-type: application/octet-stream
-----BEGIN PGP MESSAGE-----
Version: PGP 6.5
hQCMaZRG1pEOIOvdAQP+JMr0m/9+8yOL60Z9Vr6fFV81FCExB/o0xmwiMkiwYsHsz0e8sb7ErC340MrNA/dw3taGMjml
+CXyRF/PLEdg1NZE1ZCtNeL4YdiHAMLWwODGIQxhSucz8rMSgQ5mZzcOJwBdWLW70efgsu/9UljUJjYc1uZ6C03eFQv/4
3fkB+alATgydxX4g8QK664ad+Jo/XUICSmWBL66fqJR1KLeL4wTaqGy174Aq48Wpwvg1Eh785zC03UAW0qg0ugMt86dPe
yd91e2JigqwDYEf/DYEKD0J9BGiGpS/uAupNKj8Ocp2IWCkxKOGUbxpVNOntqWHS/GntegvDE/7/ewCxDxsnmQS95pOI1
41QZ1RQbeN.aqx2Dq/ra9g65HNchOCzjul5Vi8HHf6Yhg2WnROe+npByyCue6rihqqNVOJwj0cVzpb4JE+gMDf3q4ISU61Fv
7/+SSFHDdnhdC5YTpqf1Bc3B07hiLmtTXqNit31EbX9UVEIObzSa9Zhx6C6/eSl7Nuf5ZTDsh9nrk+QQJ6FeC9W4cqXLj7IZy
SaRO8Vtff+4ktqehYusT4kSpnk027aw4O/5jomUkfb22CAe4=
=Oiuo
-----END PGP MESSAGE-----
----boundary2--200309090001--
-----87453838942833--
```

Deleted: (OPEN ISSUE 002)

Formatted: Position: Horizontal:
Center, Relative to: Margin, Vertical:
0", Relative to: Paragraph, Wrap
Around

Deleted: 11/18/2003

Deleted: GMB

Inserted: GMB – DRAFT

This Receiving program should check for basic validity in the environment variables and the data stream, then . parse the variables/data from the format. Data validations should include:

- The "REQUEST_METHOD" environment variable is "POST"
- The "CONTENT_TYPE" environment variable should be "multipart/form-data" and the boundary, which cannot appear anywhere in the transaction being sent
- The input stream should support binary mode to accommodate encrypted files
- Each data element should be preceded by the boundary with the required two hyphen characters appearing before it
- Each data element should contain the correct name on the "content-disposition" line
- Each data element should have a blank line ("\\n\\n" in C+ notation) before the start of the data
- All tag values in the HTTP header should be evaluated in a case insensitive manner
- Improperly formatted input. Finding the end of the stream using both "content-length" and the boundary string terminator end mark is a good method to detect improperly formatted input.

Acknowledgement Receipt: "gisb-acknowledgement-receipt"

The Acknowledgement Receipt ("Receipt") is critical to non-repudiation and business process timing. Immediately after the Receiving program decrypts and saves the data, the Receiving program should record the time and construct a "gisb-acknowledgement-receipt". This Receipt is sent from the Receiving program to the Client prior to closing the HTTP connection.

The Receipt is a MIME-formatted text stream that includes the HTTP Response data elements (time-c, time-c-qualifier for REQ/RGQ, request-status, server-id, trans-id) in a 'multipart/report' MIME envelope.

If signed Receipts are used, the "gisb-acknowledgement-receipt" including the 'multipart/report' envelope, is digitally signed, producing an 'application/pgp-encrypted' body part. Both the 'multipart/report' "gisb-acknowledgement-receipt" and the 'application/pgp-signature' body parts are placed in a 'multipart/signed' envelope and the entire package is returned to the Sender.

The Receipt name "gisb-acknowledgement-receipt" retains the "gisb-" prefix to assure compatibility with legacy GISB EDM implementations. The name is only used in the "report-type" data element for the MIME part.

Deleted: (OPEN ISSUE 002)

Deleted: If using signed receipts, the Receiving program must also produce a digital signature of the "gisb-acknowledgement-receipt" (OPEN ISSUE 002) and send both the "gisb-acknowledgement-receipt" (OPEN ISSUE 002) and the digital signature body parts within a multipart/signed MIME envelope.¶
This receipt is sent from the Receiving program to the Client prior to closing the HTTP connection.

Deleted: ??GMB; clean up examples; references to these??

Inserted: GMB;

Deleted: <#>The "gisb-acknowledgement-receipt" (OPEN ISSUE 002) must be enveloped in a "multipart/report", as specified in ??GMB EDIINT AS2 (OPEN ISSUE 005) following the rules for Generalized Receipts.¶
<#>If signed receipts are used, the "gisb-acknowledgement-receipt" (OPEN ISSUE 002) including the multipart/report envelope is digitally signed, producing an application/pgp-encrypted body part. Both the multipart/report ("gisb-acknowledgement-receipt" (OPEN ISSUE 002)) and the "application/pgp-signature" body parts are placed in a multipart/signed envelope and the entire package is returned to the sender.¶

Inserted: <#>??

Inserted: <#>GMB

Formatted: Position: Horizontal: Center, Relative to: Margin, Vertical: 0", Relative to: Paragraph, Wrap Around

Deleted: 11/18/2003

Additional Receiving Program Functions

- All data element names of the HTTP Request and Response fields will be in lower case. Note that the Internet ET standard format file contained in the Request and Response may follow a different standard.
- Carriage returns and line feeds will be ignored in all files.
- A field delimiter of "*" will be used in the HTTP Response. Please refrain from displaying a "*" anywhere else in the response so as not to confuse programs that need to parse on this basis.
- No spaces should surround the equal sign or the field delimiter.
- The required data elements must appear first in the HTTP Response and in the order specified. Additional information can be included after the required elements at the server's discretion.
- The first occurrence of the field name within the response will contain the value.

- If an HTML response is given, all data must be presented in a user-readable fashion. For example, if the required machine-readable fields are embedded in comments, another representation of these fields must be presented to the user.

Receiving Process URL Implementation Guidelines

??LS: got some work here?? Internet ET standard 4.3.12 (OPEN ISSUE 007) states:

"As a minimum, with a trading partner agreement, one designated site for receipt should be identified for each trading partner. That site should be identified by a specific Uniform Resource Locator (URL). This does not preclude multiple designated sites being mutually agreed to between trading partners." (OPEN ISSUE 008)

Each company must offer at least one URL to accept files using Internet ET. Companies can offer multiple URLs. Though companies are free to construct a Web site with multiple "single-purpose" URLs (e.g. nominations.xyzcorp.com; enrollments.xyzcorp.com) NAESB recommends the use of one "general-purpose" URL.

The Receiving program may initiate error notifications after the "gisb-acknowledgement-receipt" is sent (e.g. file decryption errors). Error notifications posted to the Sender would be directed to the Sender's general-purpose URL.

Deleted: (OPEN ISSUE 002)

All URLs that will be required for use in the Internet ET process must be agreed to and defined in [a Technical Exchange Worksheet \(TEW\)](#) or [a Trading Partner Agreement \(TPA\)](#).

Deleted: the

Deleted: (OPEN ISSUE 008)

HTTP Response "gisb-acknowledgement-receipt" Data Elements

Required HTTP Response Data Elements (listed in the required order)	
WGQ	REQ/RGQ
time-c	time-c
request-status	time-c-qualifier
server-id	request-status
trans-id	server-id
	trans-id

Examples of HTTP Response Required Data Elements:

EXAMPLE: RESPONSE, SUCCESSFUL, MULTIPART FORMAT:

```
content-type: multipart/report; report-type="gisb-acknowledgement-receipt"; boundary="GISB7867"

--GISB7867
content-type: text/html

<HTML><HEAD><TITLE>Acknowledgement Receipt Success</TITLE></HEAD> <BODY><P>
time-c=19960619082855*
request-status=ok*
server-id=coolhost*
trans-id=234423897*
</P> </BODY></HTML>
--GISB7867
content-type: text/plain
time-c=19960619082855*
```

Deleted: (OPEN ISSUE 002)

Deleted: Content-type

Deleted: (OPEN ISSUE 010)

Deleted: Content-type

Deleted: (OPEN ISSUE 010)

Formatted: Position: Horizontal: Center, Relative to: Margin, Vertical: 0", Relative to: Paragraph, Wrap Around

Deleted: 11/18/2003

```
request-status=ok*
server-id=coolhost*
trans-id=234423897*
--GISB7867--
```

Deleted: GMB

Inserted: GMB – DRAFT

EXAMPLE: RESPONSE, SUCCESSFUL, MULTIPART FORMAT, TIME-C-QUALIFIER FOR TIME ZONE:

```
content-type: multipart/report; report-type="gisb-acknowledgement-receipt"; boundary="GISB7867"
--GISB7867
content-type: text/html
<HTML><HEAD><TITLE>Acknowledgement Receipt Success</TITLE></HEAD> <BODY><P>
time-c=19960619082855*
time-c-qualifier=-05*
request-status=ok*
server-id=coolhost*
trans-id=234423897*
time-c-qualifier=-0400
</P> </BODY></HTML>
--GISB7867
content-type: text/plain
time-c=19960619082855*
time-c-qualifier=-05*
request-status=ok*
server-id=coolhost*
trans-id=234423897*
time-c-qualifier=-0400
--GISB7867--
```

Deleted: (OPEN ISSUE 002)

Deleted: Content-type

Deleted: (OPEN ISSUE 010)

Deleted: Content-type

Deleted: (OPEN ISSUE 010)

EXAMPLE: RESPONSE, ERROR, MULTIPART FORMAT:

```
content-type: multipart/report; report-type="gisb-acknowledgement-receipt"; boundary="GISB7866"
--GISB7866
content-type: text/html
<HTML><HEAD><TITLE>Acknowledgement Receipt Error</TITLE></HEAD> <BODY><P>
time-c=19960619082855*
request-status=EEDM106: Invalid To Common Code Identifier*
server-id=coolhost*
trans-id=234423897*
</P> </BODY></HTML>
--GISB7866
content-type: text/plain
time-c=19960619082855*
request-status=EEDM106: Invalid To Common Code Identifier*
server-id=coolhost*
trans-id=234423897*
--GISB7866--
```

Deleted: (OPEN ISSUE 002)

Deleted: Content-type

Deleted: (OPEN ISSUE 010)

Deleted: Content-type

Deleted: (OPEN ISSUE 010)

EXAMPLE: RESPONSE, WARNING, MULTIPART FORMAT:

```
content-type: multipart/report; report-type="gisb-acknowledgement-receipt"; boundary="GISB7866"
--GISB7866
content-type: text/html
<HTML><HEAD><TITLE>Acknowledgement Receipt Warning</TITLE></HEAD> <BODY><P>
time-c=19960619082855*
request-status=WEDM100: Transaction Set Sent, Not Mutually Agreed*
```

Deleted: (OPEN ISSUE 002)

Deleted: Content-type

Deleted: (OPEN ISSUE 010)

Formatted: Position: Horizontal: Center, Relative to: Margin, Vertical: 0", Relative to: Paragraph, Wrap Around

Deleted: 11/18/2003

Deleted: GMB

Inserted: GMB – D R A F T¶

```
server-id=coolhost*
trans-id=234423897*
</P> </BODY></HTML>
--GISB7866
content-type: text/plain
```

Deleted: Content-type

```
time-c=19960619082855*
request-status= WEDM100: Transaction Set Sent, Not Mutually Agreed *
server-id=coolhost*
trans-id=234423897*
--GISB7866--
```

Deleted: (OPEN ISSUE 010)

EXAMPLE: RESPONSE, SUCCESSFUL , SIGNED RECEIPT:

```
content-type: multipart/signed; micalg=pgp-md5; protocol="application/pgp-signature";
boundary=--boundary2--200309090001
```

```
----boundary2--200309090001
```

```
content-type: multipart/report; report-type="gisb-acknowledgement-receipt"; boundary="GISBB7867"
```

Deleted: (OPEN ISSUE 002)

```
--GISB7867
```

```
content-type: text/html
```

Deleted: Content-type

```
<HTML><HEAD><TITLE>Acknowledgement Receipt Success</TITLE></HEAD> <BODY><P>
```

```
time-c=19960619082855*
request-status=ok*
server-id=coolhost*
trans-id=234423897*
```

Deleted: (OPEN ISSUE 010)

```
</P> </BODY></HTML>
```

```
--GISB7867
```

```
content-type: text/plain.
```

Deleted: Content-type

```
time-c=19960619082855*
request-status=ok*
server-id=coolhost*
trans-id=234423897*
```

Deleted: (OPEN ISSUE 010)

```
--GISB7867--
```

```
----boundary2--200309090001
```

```
content-type: application/pgp-signature
```

```
-----BEGIN PGP MESSAGE-----
```

```
Version: 2.6.26.5
```

```
iQCVAwUBMJrRF2N9oWBghPDJAQE9UQQA7LuRVndBjrk4EqYBIb3h5QXIX/LC//JV5bNvkZIGPIcEmI5iFd9boEgvpHt
IREEqLQRkYNbActFBZmh9GC3C041WGquMbrbxc+nIs1TIKIA08rVi9ig/2Yh7LFrK5Ein57U/W72vgSxLhe/zhdfoIT9BrnH
OxEa44b+EI=
=ndaj
```

```
-----END PGP MESSAGE-----
```

```
----boundary2--200309090001--
```

EXAMPLE: RESPONSE, SUCCESSFUL:

```
HTML format (this example is for a successful transmittal): <html> <head> <title> Upload OK</ title></ head> <!-- time-
c= 19960123203618*-->_<!-- request- status= ok* --> <!-- server- id= coolhost*--> <!-- trans- id= 232323897*--> <h1>
Upload OK </ h1>< br> <body> <B> File Saved at (time- c): </B> 19960123203618< br> <B> Status (request- status):
</ B> ok< br> <B> Server (server- id): </ B>coolhost< br> <B> Transaction ID (trans- id): </ B> 232323897< br> </
```

Formatted: Position: Horizontal:
Center, Relative to: Margin, Vertical:
0", Relative to: Paragraph, Wrap
Around

Deleted: 11/18/2003

body> </html>

Deleted: GMB

Inserted: GMB – D R A F T

Deleted: (OPEN ISSUE 010)

SENDING INTERNET ET ERROR NOTIFICATIONS

When a Client sends an Internet ET package to a Server, the Server responds with a receipt. Further back-office processing (e.g. decryption) may be required, and additional errors may be found.

Error Notification transactions are used to communicate transport errors found by the Receiver after the initial receipt is sent to the Sender.

Errors from translation and other back-office processing are outside the scope of the Internet ET.

When a file passes the decryption step, no error notification is sent back to the Client. If the decryption step fails, an error notification must be sent to the Client.

The Error Notification format applies to the posting of an error message after the Sender's session has been disconnected. This error notification is used only if the original HTTP Response is returned with an "ok".

Deleted: or a warning (WEDM999 format) for the request-status value.

Additionally, trading partners are permitted to use digitally-signed error notifications, if both parties mutually agree to do so.

Required Error Notification Data Elements

The data elements for the error notification are the same as those described in the Section "Sending Transactions", with the exception of the "input-format" and "input-data" elements. The file containing the data elements for error notification should not be encrypted.

Required Data Elements for Error Notification (listed in the required order):

- 'from'
- 'to'
- 'input-format'

Formatted: NAESB Bullets Tight

Deleted: Data Element Name ... [7]

Error Notification "input-data" Element Specifications:

- The file containing the data elements for error notification should not be encrypted.
- All data element names will be in lower case in the Error Notification.
- Carriage returns and line feeds will be ignored in all files.
- A field delimiter of "*" will be used in the Error Notification. Please refrain from displaying a "*" anywhere else in the error notification so as not to confuse programs that need to parse on this basis.
- No spaces should surround the equal sign or the field delimiter.
- The required data elements must appear first in the response.

Formatted: Position: Horizontal: Center, Relative to: Margin, Vertical: 0", Relative to: Paragraph, Wrap Around

Deleted: 11/18/2003

Deleted: GMB

Inserted: GMB – D R A F T¶

- Additional information can be included after the required elements at the server's discretion.
- The first occurrence of the field name within the response will contain the value.
- An error notification contains two body parts nested within a multipart/report outer envelope with the content-type of "gisb-error-notification"▼
- The first body part contains human readable content in HTML. The second body part contains machine readable content in plain text. Additionally, consenting trading partners can mutually agree to digitally sign error notifications.
- If digital signatures are used, the multipart/report containing the Error Notification is used to create a digital signature body part, identified by a "content-type" of application/pgp-signature. Both the multipart/report Error Notification and application/pgp-encrypted digital signature body parts are combined in a multipart/signed envelope.

Deleted: (OPEN ISSUE 014)

EXAMPLE: ERROR NOTIFICATION INTERNET ET PACKAGE:

```
POST /cgi-bin/AS2dispatcher HTTP/1.1
Referer: http://www.acmeenergy/upl.htm
Connection: Keep-Alive
User-Agent: brow v0.1 XYZ Corp.
Host: localhost
Accept: image/gif, image/x-xbitmap, image/jpeg, image/pipeg, */*
content-type: multipart/form-data; boundary=-----87453838942833
Content-Length: 1958
-----87453838942833
content-disposition: form-data; name="from"

234567890
-----87453838942833
content-disposition: form-data; name="to"

123456789
-----87453838942833
content-disposition: form-data; name="version"

1.6
-----87453838942833
content-disposition: form-data; name="receipt-disposition-to"

123456789
-----87453838942833
content-disposition: form-data; name="receipt-report-type"

gisb-acknowledgement-receipt ▼
-----87453838942833
content-disposition: form-data; name="input-format"

error
-----87453838942833
content-disposition: form-data; name="input-data"; filename="c:\temp\error.not"
content-type: multipart/report; report-type="gisb-error-notification"; boundary="GISB7868"▼
--GISB7868
content-type: text/html
<HTML><HEAD><TITLE>Error Notification</TITLE></HEAD> <BODY><P>
orig-from=123456789*
orig-to=234567890*
```

Deleted: Content-type

Deleted: (OPEN ISSUE 002)

Deleted: (OPEN ISSUE 014)

Deleted: Content-type

Formatted: Position: Horizontal: Center, Relative to: Margin, Vertical: 0", Relative to: Paragraph, Wrap Around

Deleted: 11/18/2003

Deleted: GMB

Inserted: GMB – D R A F T

Deleted: (OPEN ISSUE 010)

orig-input-format=X12*
resp-time-c=19960619102855*
resp-server-id=coolhost*
resp-trans-id=234423897*
request-status=EEDM601: Public Key Invalid*
comments=Please contact 1-800-555-1212 for correct public key*
</P> </BODY></HTML>

--GISB7868
content-type: text/plain

orig-from=123456789*
orig-to=234567890*
orig-input-format=X12*
resp-time-c=19960619102855*
resp-server-id=coolhost*
resp-trans-id=234423897*
request-status=EEDM601: Public Key Invalid*
comments=Please contact 1-800-555-1212 for correct public key*
--GISB7868--
-----87453838942833--

Signed Error Notification

content-type: multipart/signed; micalg=pgp-md5; protocol="application/pgp-signature";
boundary=--boundary2--200309090001

----boundary2--200309090001

content-type: multipart/report; report-type="gisb-error-notification"; boundary="GISB7868"

--GISB7868
content-type: text/html

<HTML><HEAD><TITLE>Error Notification</TITLE></HEAD> <BODY><P>
orig-from=123456789*
orig-to=234567890*
orig-input-format=X12*
resp-time-c=19960619102855*
resp-server-id=coolhost*
resp-trans-id=234423897*
request-status=EEDM601: Public Key Invalid*
comments=Please contact 1-800-555-1212 for correct public key*

</P> </BODY></HTML>

--GISB7868
content-type: text/plain

orig-from=123456789*
orig-to=234567890*
orig-input-format=X12*
resp-time-c=19960619102855*
resp-server-id=coolhost*
resp-trans-id=234423897*
request-status=EEDM601: Public Key Invalid*
comments=Please contact 1-800-555-1212 for correct public key*

--GISB7868--
----boundary2--200309090001

content-type: application/pgp-signature

Deleted: (OPEN ISSUE 010)

Deleted: (OPEN ISSUE 014)

Deleted: Content-type

Deleted: (OPEN ISSUE 010)

Deleted: (OPEN ISSUE 010)

Formatted: Position: Horizontal:
Center, Relative to: Margin, Vertical:
0", Relative to: Paragraph, Wrap
Around

Deleted: 11/18/2003

-----BEGIN PGP MESSAGE-----

Version: 6.5

iQCVAwUBMJrRF2N9oWBghPDJAQE9UQQAtI7LuRVndBjrk4EqYBlb3h5QXIX/LC//JV5bNvkZIGPIcEmI5iFd9boEgvpHt
 IREEqLQRkYNoBActFBZmh9GC3C041WGquMbrbxc+nIs1TIKIA08rVi9ig/2Yh7LFrK5Ein57U/W72vgSxLhe/zhdfoIT9BrnH
 OxEa44b+EI=
 =ndaj

-----END PGP MESSAGE-----

-----boundary2--200309090001--

Pre-validation before Decryption

Proper trapping of the range of decryption process errors listed in Table A (Internet EDM Standard Error Messages and Codes) may require program code which is external to the decryption algorithm. Some versions of the PGP software do not explicitly discriminate between EEDM601, EEDM602, EEDM603, and EEDM699 type errors.

Under such a circumstance, files inbound to the decryption process should be preprocessed to trap the errors not identified by the PGP version being used. For example, searching the file for the text strings "BEGIN PGP MESSAGE" and "END PGP MESSAGE" can quickly identify "EEDM602 File not encrypted" and "EEDM603 Encrypted file truncated" type errors when the implemented PGP version only identifies decryption success, invalid public key (EEDM601), and decryption failure (EEDM699).

SECURITY

Internet ET security requirements include four primary security aspects: data Privacy, data Integrity, Authentication, and Non-repudiation (PAIN).

- Data privacy: unauthorized parties cannot decipher the content of the data.
- Authentication: the receiver is certain of the identity of the sender.
- Data integrity: unauthorized parties cannot modify or corrupt the data.
- Non-repudiation: the sender cannot deny ownership of the transaction if it was sent with his/her digital signature.

In general, these needs are met by using the Basic Authentication capability of the Web server and the encryption and digital signature capability of the PGP and OpenPGP security application for securing transactions.

Understanding PGP and OpenPGP

Pretty Good Privacy (PGP) is the name of the chosen security application. OpenPGP is the Internet Engineering Task Force standard version of PGP which excludes all patented algorithms, allowing free commercial use of the standard. See the NAESB Web site for information on software packages to implement the PGP or OpenPGP security application. Both OpenPGP and PGP use a public key/private key pair to accomplish secure file transfers. The private key must be known only to the company which generated it. The public key counterpart is shared with trading partners.

Formatted: Position: Horizontal: Center, Relative to: Margin, Vertical: 0", Relative to: Paragraph, Wrap Around

Deleted: 11/18/2003

Each company must generate its public key and private key pair. The RSA key generation algorithm should be chosen for versions of PGP which offer alternatives. Implementers of OpenPGP should choose DSA and El Gamal when creating their key pair. The public keys will be distributed using a secure method (e.g., courier mail) to the company's trading partners.

You must use the utmost care in protecting your private key. If compromised, the security is broken. It is recommended that a key size of 1024 be chosen when generating the key pair. This provides a significantly secure transaction.

When a company wishes to send transactions to its trading partner, it will use the partner's public key to encrypt the file. Encryption provides data privacy. Only the private key counterpart can decrypt this file.

When the sending party encrypts the file, it also uses its own private key to "sign" the transaction. The receiving party can use the sender's public key to verify the signature. The digital signature provides non-repudiation.

Encryption / Digital Signature

Encryption and signatures are applied to files already translated to a NAESB standard data format, and before the data is sent to the batch browser. (Use of internal encryption such as X12.58 encryption is outside the scope of NAESB encryption standards but does not conflict with PGP.)

Encryption and signatures can be accomplished manually for each file using the online PGP or, on a mutually-agreed-upon basis, OpenPGP software, or in an automated (or "batch") fashion using programs to encrypt and sign. Whether encrypting in a manual or automated fashion, it is essential that the correct public key of the trading partner be used to encrypt and just as essential that the correct sender's own private key be used to digitally sign the file.

Digital signatures may also be applied, on a mutually-agreed-upon basis, to the HTTP Response by the Receiver of the package.

Decryption / Signature Verification

After a package is received and processed by the Receiving program, it is ready to be decrypted and have its signature verified. Given the correct userID for a trading partner, PGP and OpenPGP software use the appropriate key pair to encrypt, sign and decrypt. Upon request for signature verification, the PGP and OpenPGP software will return a human-readable descriptive text such as DUNS number or company name.

NAESB recommends that each party create a process where the descriptive text is used to look up the ID of the trading partner in a database table. If the ID is passed along with the decrypted file, a process could be created to verify that the trading partner which sent the transaction corresponds to the trading partner identified within the file, once the data has been translated.

When digital signatures are applied, on a mutually-agreed-upon basis, the HTTP Response received by the sender of the transaction may be verified to ensure non-repudiation of receipt of the transaction.

Throughput Considerations

Formatted: Position: Horizontal: Center, Relative to: Margin, Vertical: 0", Relative to: Paragraph, Wrap Around

Deleted: 11/18/2003

Encryption, digital signing, decryption and signature verification are all very CPU intensive. Companies anticipating large volumes of Internet ET traffic should research state-of-the-art techniques for scalability, including but not limited to:

- separating decryption and signature verification processing from web server receiving and processing
- passing secured or to-be-secured packages to a separate computer for security processing
- optimizing CPU and memory on security processing computers
- real-time or near real-time monitoring of website performance

Implementers of Internet ET sites should review and evaluate Domain Name Server (DNS) cache refresh intervals so as to ensure trading partner address changes are recognized on a timely basis. A refresh interval of 24 hours or less is common.

Because decryption and signature verification are not handled at the time the file is received, the sender will get an HTTP Response of successful transfer but doesn't know if the file can be decrypted by the receiver. Guidelines for communicating the status of the decryption step have been developed. See Section "Sending Error Notification Transactions" and Table A, "Internet EDM Standard Error Codes and Messages".

Security Requirements

Basic Authentication

Basic authentication, also known as realm one security, has been defined as one of the security standards for transmission on the Internet. The userid and password will be assigned by the server party according to site standards. The TPA must identify the userid and password for this security as well as procedures for changing the password, if applicable.

Deleted: (OPEN ISSUE 008)

PGP or OpenPGP File Encryption

Payload files are encrypted using PGP 6.5 or greater (using keys generated with the RSA algorithm); or on a mutually-agreed-upon basis the OpenPGP standard, specified in IETF RFC 2440. There are freely available software implementations of the OpenPGP standard available at <http://www.gnupg.org/>.

Other Security Recommendations

A firewall should be deployed to protect HTTP servers.

CLIENT AND SERVER SPECIFICATIONS

Synchronization. Each Client and Server should be synchronized to a clock in the network of atomic clocks that is accessible via the Internet. The Client and Server should be synchronized as necessary to ensure synchronization with an atomic clock +/- 20 seconds. Please refer to Appendix A, "Time Synchronization" for references on public sites for synchronization.

Deleted: –

Formatted: Position: Horizontal: Center, Relative to: Margin, Vertical: 0", Relative to: Paragraph, Wrap Around

Deleted: 11/18/2003

Deleted: GMB

Inserted: GMB – DRAFT¶

7 – TESTING GUIDELINES

NAESB INTERNET ET TEST GUIDELINES

Deleted: ELECTRONIC
TRANSPORT (ET)

Implementation of Internet ET requires testing to assure all parties are prepared to operate according to the Internet ET. This document focuses on testing standards for establishing Internet ET connectivity with a trading partner. Testing for transaction and other quadrant-specific testing standards can be found in each quadrant's QEDM.

Internet ET Connectivity testing standards may include:

- Connectivity test scripts. These scripts define the steps needed to adequately test connectivity.
- Technical Exchange Worksheet (TEW). This worksheet defines important operations parameters for a trading partner. The parameters include Internet ET URL's, contacts and other information.

Deleted: ET

Deleted: –

Deleted:

Deleted: –

Deleted: ET

Deleted: <#>Testing Signoff Worksheet – This worksheet defines critical operations environment characteristics of the trading partner. The characteristics include testing environments.¶

GENERAL TESTING ASSUMPTIONS

The following assumptions apply to Internet ET testing:

- This Test Plan covers Internet ET testing. Transactions and business process test plans can be found in the QEDM.
- Testing may uncover problems. Problems found during testing should be expected.
- This Test Plan is a basic demonstration of competency, and may not uncover all problems that may eventually require correction.
- In normal circumstances, trading partner to trading partner Internet ET connectivity testing takes approximately two weeks once begun.

Deleted: ET

Deleted: ET

Deleted: ET

TESTING GOALS

The primary testing goals of this Internet ET Test Plan are:

- Establish Internet ET connectivity between trading partners including Internet connections and encryption compatibility.
- Validate that normal production transaction files can be delivered.
- Validate that a large file (1MB or larger) can be delivered.
- Validate that Internet ET Receipts are being delivered.
- Validate that protocol failures are handled properly.
- Validate that exchange failures are handled properly.
- Validate that encryption/decryption and digital signature failures are handled properly.

Deleted: specific

Deleted: ET

Deleted: ET

Deleted: sent

Formatted: Bullets and Numbering

Deleted: ET

Formatted: Position: Horizontal: Center, Relative to: Margin, Vertical: 0", Relative to: Paragraph, Wrap Around

Deleted: 11/18/2003

TEST EXECUTION

Deleted: GMB

Inserted: GMB – DRAFT

Scripts

Test Scripts detail each step of the testing process for Connectivity. Scenarios test for both positive (accept) and negative (reject) results. Typical Test Scripts involve an exchange (Request and Response) of data between trading partners.

Testing Scripts~~??LS~~

Each TP will confirm receipt of test file exchange via normal Internet ET standards. A copy of the payload file can be sent via e-mail for verification.

- Each TP should confirm that received files were not corrupted.
- Each TP shall exercise fail-over mechanisms by simulating a protocol failure and an exchange failure, triggering the appropriate notices to the identified Market Participant contacts.
- Each TP shall exercise encryption failure processes by simulate an encryption/decryption failure, triggering the appropriate notices to the identified Market Participant contacts.
- Each TP shall send a formal notice of successful certification completion to their TP

[??more detailed scripts?]

Recommended Internal Tests

In addition to tests executed with trading partners, the following tests are recommended as internal tests of Internet ET systems.

- Stress Test Ability to send and receive large production files (e.g. 10MB minimum uncompressed).
- Fail-over test Test any processes triggered by a protocol or exchange failure by your trading partner.

??include web page for interactive upload.

- As an optional preliminary step, acquire or develop an HTML page for interactive file upload (sample code is earlier in this document). Test interactive file upload to your own server using an interactive browser.
- Thoroughly test using the incorrect userid and password against the secure directory.
- Request that several other trading partners and/or several clients within your own company transfer concurrently to ensure that your server can withstand the load.
- Test application with various simulated errors in both file transfers and in PGP or OpenPGP decryption.

Deleted: ET

Formatted: Bullets and Numbering

Deleted: ET

Deleted: –

Deleted: –

Formatted: Indent: Before: 0", Hanging: 0.5"

Deleted: CHECKLIST OF TESTING STEPS (OPEN ISSUE 015)

Inserted: (OPEN ISSUE 015)

Deleted: Purpose¶
Preliminary steps in testing are helpful before the full batch browser and server applications are completed. This checklist is intended to provide a series of small achievements leading up to the complete solution.¶

Deleted: Client/Browser¶

Deleted: NOTE: Throughout all transfer tests, compare files stored on the server against the source file to ensure that the file transferred intact. While transferring to another company's server, you may have to contact that company to send the file back to you so that you can perform the compare.¶
<#>Install an interactive browser. Identify an existing Web server from among NAESB WGQ compliant servers offering interactive upload for test. See the NAESB WGQ home page for a list of organizations willing to act as testing partners. These organizations should have a URL complete with the CGI program name to which a tester may send test files. File content does not need to be X12 or other NAESB WGQ standard format to accomplish this step in testing.¶
<#>Develop or acquire a batch browser that uses multipart for the encoding methodology. Transfer the same test file as in step 1 to the URL not requiring Realm One security.¶
<#>Add Realm One security to your file transfer, and change the Urf ... [8]

Deleted: <#>Acquire or develop a CGI program to receive file transfers and process according to NAESB ... [9]

Deleted: <#>Generate a second public/private key pair. Use the second key to encrypt a file at ... [10]

Formatted ... [11]

Deleted: 11/18/2003

8 – TABLES AND APPENDICES

TABLE A – INTERNET ET STANDARD ERROR CODES AND MESSAGES

These errors and warnings are strictly related to problems found in the Receiving program or decryption levels of processing before translation. Errors and warnings generated by the Client batch browser are assumed to be documented at the Client site to distinguish them from problems occurring in the Receiving program or decryption. Numbering schemes and descriptions should aid in this distinction.

EEDM### standard error format with ### representing a numeric value; further processing will not take place

WEDM### standard warning format with ### representing a numeric value; further processing will take place

The string for the error or warning should appear in the following format:

[Validation Code]:[Description];[supplemental message to be defined by the issuing site up to 80 characters]

Formatted: Position: Horizontal: Center, Relative to: Margin, Vertical: 0", Relative to: Paragraph, Wrap Around

Deleted: 11/18/2003

Internet ET Standard Error Codes and Messages

Validation Code	Description	Data Element	Data Element Required or. Mutually Agreed
EEDM100	Missing "from" Common Code Identifier code	from	required
EEDM101	Missing "to" Common Code Identifier	to	required
EEDM102	Missing input format	input-format	required
EEDM103	Missing data file	input-data	required
EEDM104	Missing transaction set	transaction-set	mutually agreed
EEDM105	Invalid "from" Common Code Identifier	from	required
EEDM106	Invalid "to" Common Code Identifier	to	required
EEDM107	Invalid input format	input-format	required
EEDM108	Invalid transaction set	transaction-set	mutually agreed
EEDM109	No parameters supplied	parameter string	required
EEDM110	Invalid "version"	version	required
EEDM111	Missing "version"	version	required
EEDM112	"receipt-security-selection" not mutually agreed	receipt-security-selection	mutually agreed
EEDM113	Invalid "receipt-security-selection"	receipt-security-selection	mutually agreed
EEDM114	Missing "receipt-disposition-to"	receipt-disposition-to	required
EEDM115	Invalid "receipt-disposition-to"	receipt-disposition-to	required
EEDM116	Missing "receipt-report-type"	receipt-report-type	required
EEDM117	Invalid "receipt-report-type"	receipt-report-type	required
EEDM118	Missing "receipt-security-selection"	receipt-security-selection	mutually agreed
EEDM119	Mutually agreed element, refnum, not present	refnum	mutually agreed
EEDM601	Public key invalid	file itself	required - security
EEDM602	File not encrypted	file itself	required - security
EEDM603	Encrypted file truncated	file itself	required - security
EEDM604	Encrypted file not signed or signature not matched	file itself	required - security
EEDM699	Decryption Error		required for general decryption errors not specifically identified by PGP or OpenPGP messages or exit codes
EEDM701	Sending party not associated with Receiving party		required
EEDM702	Package file format not recognized by receiving party		??required if the Internet ET translator does not handle this exception
EEDM703	Data set exchange not established for Trading Partner		required if the translator does not handle this exception
EEDM999	System error		required for general system errors to indicate severe errors in processing at the receiving site
WEDM100	Transaction set sent not mutually agreed	transaction-set	mutually agreed
WEDM102	"receipt-security-selection" not mutually agreed	receipt-security-selection	mutually agreed
WEDM103	Missing "receipt-security-selection"	receipt-security-selection	mutually agreed
WEDM104	Element refnum received, not mutually agreed; ignored	Refnum	mutually agreed

Deleted: GMB

Inserted: GMB – D R A F T¶

Formatted ... [12]

Formatted ... [13]

Formatted Table ... [14]

Formatted ... [15]

Formatted ... [16]

Formatted ... [17]

Formatted ... [18]

Formatted ... [19]

Formatted ... [20]

Formatted ... [21]

Formatted ... [22]

Formatted ... [23]

Formatted ... [24]

Deleted: (OPEN ISSUE 016)

Formatted ... [25]

Formatted ... [26]

Formatted ... [27]

Formatted ... [28]

Formatted ... [29]

Formatted ... [30]

Formatted ... [31]

Formatted ... [32]

Formatted ... [33]

Formatted ... [34]

Formatted ... [35]

Formatted ... [36]

Formatted ... [37]

Formatted ... [38]

Formatted ... [39]

Formatted ... [40]

Deleted: ¶ ... [41]

Deleted: EDM party ... EDI ... [42]

Formatted ... [43]

Deleted: ¶ ... [44]

Formatted ... [45]

Deleted: ET

Inserted: ET

Deleted: Data Structure Error

Formatted ... [46]

Deleted: ¶ ... [47]

Formatted ... [48]

Formatted ... [49]

Formatted ... [50]

Formatted ... [51]

Formatted ... [52]

Formatted ... [53]

Deleted: 11/18/2003

8 - APPENDICES

APPENDIX A - Reference Guide

Receiving Program

Options include Active Server Pages (ASP), Common Gateway Interface (CGI), Java Server Pages (JSP), Java Servlet technology and other technologies.

Information on ASP may be found on Microsoft's web site (www.microsoft.com).

A source on CGI is a book entitled "Special Edition Using CGI" by Jeffrey Dwight and Michael Erwin.

Information on JSP and Servlet technology may be found at SUN's web site (<http://java.sun.com>).

Firewall Security

A source which covers this topic in detail is a book entitled "Firewalls and Internet Security: Repelling the Wily Hacker" by William Cheswick and Steven Bellovin.

NAESB

NAESB Web Site: (www.naesb.org) Primary reference for energy industry standards.

HTTP

The NAESB Internet ET architecture is based on HTTP 1.1, and all implementations should be compatible with this version.

W3C WorldWide Web Consortium. All aspects of HTTP, HTML, and other Web-related topics are documented at: www.w3.org/pub/WWW/

General information regarding HTTP with basic terminology included are documented at: www.w3.org/pub/WWW/Protocols/HTTP/1.1/spec.html

Syntax information for multipart can be found in IETF RFC1341 section 7.2. (www.ietf.org)

HTML

Information on HTML 4.0 may be found at www.w3.org/TR/REC-html40/

www.ncsa.uiuc.edu/General/Internet/WWW/HTMLPrimer.html

PGP Software

PGP is available for a variety of operating systems and platforms. For more information contact Network Associates (www.nai.com) or PGP Corporation, (www.pgp.com)

Deleted: GMB

Inserted: GMB – D R A F T¶

Formatted: Centered

Deleted: -----Page Break-----
10 – APPENDICESInserted: 10 – APPENDICES¶
APPENDIX A - Reference Guide¶
Receiving Program¶

Options include Active Server Pages (ASP), Common Gateway Interface (CGI), Java Server Pages (JSP), Java Servlet technology and other technologies.¶

Information on ASP may be found on Microsoft's web site (www.microsoft.com). ¶A source on CGI is a book entitled "Special Edition Using CGI" by Jeffrey Dwight and Michael Erwin.¶
Information on JSP and Servlet technology may be found at SUN's web site (<http://java.sun.com>).¶

Firewall Security¶

A source which covers this topic in detail is a book entitled "Firewalls and Internet Security: Repelling the Wily Hacker" by William Cheswick and Steven Bellovin.¶

NAESB¶

NAESB Web Site: (www.naesb.org) Primary reference for energy industry standards.¶

HTTP¶

The NAESB Internet ET architecture is based on HTTP 1.1, and all implementations should be compatible with this version.¶

W3C WorldWide Web Consortium.¶

All aspects of HTTP, HTML, and other Web-related topics are documented at: ¶

www.w3.org/pub/WWW/¶

General information regarding HTTP with basic terminology included are documented at: ¶

www.w3.org/pub/WWW/Protocols/HTTP/1.1/spec.html¶Syntax information for multipart can be found in IETF RFC1341 section 7.2. (www.ietf.org) ¶

HTML¶

Information on HTML 4.0 may be found at www.w3.org/TR/REC-html40/. (OPEN ISSUE 018)¶www.ncsa.uiuc.edu/General/Internet/WWW/HTMLPrimer.html¶

PGP Software¶

PGP is available for a variety of operating systems and platform(... [54]

Deleted: (OPEN ISSUE 018)

Formatted: Position: Horizontal: Center, Relative to: Margin, Vertical: 0", Relative to: Paragraph, Wrap Around

Deleted: 11/18/2003

Deleted: GMB

Inserted: GMB – D R A F T

OpenPGP Software

The IETF OpenPGP standard is available at www.ietf.org/rfc/rfc2440.txt

Software implementations of the OpenPGP standard are freely available for commercial use from the Free Software Foundation at www.gnupg.org.

Time Synchronization

Testing has shown that the clocks on all computer systems drift. Time synchronization is required to assure that all trading partners transaction times are accurate. Time accuracy is dependent on how much a system's clock drifts, how frequently it is resynchronized and the accuracy of the source used for synchronization.

Authoritative time synchronization is now being provided by governmental agencies around the world based on a synchronized network of atomic clocks. In the United States this includes the U. S. Naval Observatory and the National Institute of Standards and Technology.

An easy way to obtain the current time is from the U. S. Naval Observatory's Web site at tycho.usno.navy.mil/cgi-bin/timer.pl. The output from this page can easily be edited and reformatted to set a local system's time. Commercial, shareware and public domain packages are also available to synchronize system times. Among them are NTP (which is an Internet standard), Internet daytime, nisttime / usnotime.

Further information on time synchronization may be found at the following Web sites:

<http://tycho.usno.navy.mil/ntp.html>

www.ccd.bnl.gov/xntp

Deleted:

Formatted: Position: Horizontal: Center, Relative to: Margin, Vertical: 0", Relative to: Paragraph, Wrap Around

Deleted: 11/18/2003

Deleted: GMB

Inserted: GMB – DRAFT¶

Deleted: TABLE

Inserted: TABLE B – FREQUENTLY ASKED QUESTIONS¶

APPENDIX B – FREQUENTLY ASKED QUESTIONS

Q: Use of “time-c-qualifier” across quadrants. We understand that the retail quadrants require the “time-c-qualifier” for “gisb-acknowledgement-receipt”, while the WGQ does not require this data element. If we participate in multiple quadrants, which standard do we use?

A: You are required to follow the standards dictated by the quadrant that governs the transaction or business process. For example, if you are executing a WGQ nomination, then you should adhere to WGQ standards, which do not require the “time-c-qualifier”. If you are executing an REQ enrollment, you need to adhere to the REQ standards, which require “time-c-qualifier”. Of course, all parties can mutually-agree to use the “time-c-qualifier” or not.

Q: NAESB EDM / AS2 Compatibility. What is the status of NAESB compatibility with AS2?

A:

Q: Atomic Clock Synchronization. How often do we need to synchronize our system clocks with an atomic clock?

A: As often as necessary to ensure synchronization to within +/- 20 seconds of the atomic clock.

Q: Internet Continuous Connection. As an end user, do I need a continuously connected internet Web server to participate in the Internet EDM in the energy industry, or can I just use a dial-up connection to my ISP and my favorite shrink-wrapped browser software?

A: An interactive browser connection is not enough to actively participate in the system. It is not necessary to have a private Web server, you can use a service, however the system requires that you have access to a permanent internet connection which is capable of both sending and receiving files without operator intervention.

Q: Use of ANSI X12.58. If we use ANSI X12.58 encryption do we still need to use PGP or OpenPGP encryption?

A: The use of internal encryption such as X12.58 is outside the scope of the NAESB REQ encryption standards.

Formatted: NAESB Section Title

Formatted: Position: Horizontal: Center, Relative to: Margin, Vertical: 0", Relative to: Paragraph, Wrap Around

Deleted: 11/18/2003

APPENDIX C – SAMPLE TECHNICAL EXCHANGE WORKSHEET (TEW)**Company and Contact Information**

Company info:	
Provider info:	

Technical Specifications

	Transaction/EDI Contact	Communications Contact
Primary Name:		
Telephone:		
Fax:		
E-mail:		
Secondary Name:		
Telephone:		
Fax:		
E-mail:		

Transport Specifications

	Test	Production
DUNS/DUNS+4 Number		
HTTP 'to' Value		
ISA06/08 Interchange ID		
Using 'time-c-qualifier' in Receipt? (Y/N)		
X12 Segment Terminator:		
X12 Data Element Separator:		
Primary Internet ET URL		
Server Name:		
CGI Path:		
Port:		
Userid:		
Password:		
Error URL (Option)		
Server Name:		
CGI Path:		
Port:		
Userid:		
Password:		
Test URL (Option)		
Server Name:		
CGI Path:		
Port:		
Userid:		
Password:		
PGP Public Key	Distribution	Distribution
Finger Print	Distributed with Key	Distributed with Key
Userid (Alpha, spaces, numbers only; no special characters)		
Key Contact Person		

Deleted: GMB

Inserted: GMB – D R A F T

Formatted ... [55]

Formatted ... [56]

Formatted Table ... [57]

Formatted ... [58]

Formatted ... [59]

Formatted Table ... [60]

Formatted ... [61]

Formatted ... [62]

Formatted ... [63]

Formatted Table ... [64]

Formatted ... [65]

Formatted ... [66]

Formatted ... [67]

Formatted ... [68]

Formatted ... [69]

Formatted ... [70]

Formatted ... [71]

Formatted ... [72]

Formatted ... [73]

Formatted ... [74]

Formatted ... [75]

Formatted ... [76]

Formatted ... [77]

Formatted ... [78]

Formatted ... [79]

Formatted ... [80]

Formatted ... [81]

Formatted ... [82]

Formatted ... [83]

Formatted ... [84]

Formatted ... [85]

Formatted ... [86]

Formatted ... [87]

Formatted ... [88]

Formatted ... [89]

Formatted ... [90]

Formatted ... [91]

Formatted ... [92]

Formatted ... [93]

Formatted ... [94]

Formatted ... [95]

Deleted: -----Page Break----- [96]

Inserted: -----Page Break-----

Formatted ... [97]

Inserted: ??

Formatted ... [98]

Deleted: 11/18/2003

HTTP Transport for Secure EDI (a.k.a. IETF EDIINT AS2)

The open standard technologies selected by NAESB WGQ/REQ/RGQ to address these areas are designed to provide flexibility and scalability. There are business benefits gained from adherence to "HTTP Transport for Secure EDI" such as:

- Allows potential to more readily, electronically trade with others (e.g., utilities, financial institutions, suppliers, retail customers)

- Makes it more likely that Commercial Off-The-Shelf (COTS) software packages can be purchased to replace custom written applications currently in place to support legacy GISB/NAESB EDM

- Strengthens the surety of receipt and error notification

HTTP Transport for Secure EDI (AS2) is an emerging standard, largely based on the original NAESB WGQ EDM, that is being developed by the Internet Engineering Task Force, the Internet standards body. Adherence with a formal, international Internet standard, such as AS2 ensures that the specification will not change without due process and any changes that do occur will be the result of a broad consensus in the international community. Individual companies and entire industries are free to use as much or as little of AS2 as they see fit, providing the maximum flexibility to meet business needs. The specific implementation of the standards is dependent upon what fits the trading partner's needs and available resources. A brief delineation of these components is covered at a high level in the Business Process and Practices (Major functions of Internet EDM covered by the Standards) section and in more detail in later sections.

Same Internet ET Implementation For All Trading Partners.

Same Internet ET Implementation For All Trading Partners.

Position: Horizontal: Center, Relative to: Margin, Vertical: 0", Relative to: Paragraph, Wrap Around

ANSI ASC X12 Standards

The NAESB REQ standards reflect an industry utilization of the American National Standards Institute (ANSI) ASC X12 standards maintained by the Data Interchange Standards Association, Inc. (DISA). It is recommended that any industry participant who wishes to utilize the ANSI ASC X12 standards should also have a copy of the ANSI ASC X12 Standards Reference document for a full understanding of the X12 requirements. NAESB members may purchase an ANSI reference document through NAESB by contacting the NAESB office. Non-NAESB industry participants may purchase the reference document by contacting:

Manager of Publications
DISA
333 John Carlyle Street, Suite 600
Alexandria, VA 22314
Voice: 703-548-7005
Fax: 703-548-5738
www.disa.org

As a member of ANSI, NAESB REQ will utilize the ANSI ASC X12 standards and remain in full compliance. In all standards, occasions arise where the standard does not fully meet a need. NAESB REQ recognizes this and will add interim usages and code values when required. When NAESB REQ utilizes an interim solution, NAESB REQ will apply to ANSI and the appropriate ANSI organizations for acceptance of the interim solution. ANSI's final solution may provide a usage or code value different than the interim solution. NAESB REQ standards will be updated to reflect the final solution. (OPEN ISSUE 023)

The architecture of ASC X12 is designed for end to end communications. The translator that generates the ASC X12 file and envelope will assign control numbers and counts that will appear within the ISA/IEA segments of the transaction and within the GS/GE segments of the transaction. These numbers and counts allow the translator to ensure that all of the segments in an envelope and all of the data elements in an envelope have been received and that the transmission was complete.

ISA contents

The ISA segment marks the beginning of an X12 document. It can be equated to an envelope that a paper document would come in via the mail. The envelope may contain one or more functional groups (defined by the GS segment) and one or more transaction sets.

The ISA is the interchange control segment to be utilized on all NAESB REQ X12 standards. (OPEN ISSUE 023) The segment identifies the sender and receiver of the document. The Interchange Sender ID/Interchange Receiver ID is published by both the sender and receiver for other parties to use as the sender/receiver ID to route data to them. The sender must always code the sender's ID in the sender element and the designated receiver's ID in the receiver element. Trading partners utilizing a password for their documents will use the Security Information element. The receiver of the document identifies a password for the sender to include in this element. (OPEN ISSUE 024) REQ .

There are additional elements in the ISA segment. These elements are traditionally assigned by the sending party's translator. These elements inform the receiver of the date/time that the envelope was generated, the X12 version number being utilized, whether the transmission is for test or production purposes, and what characters were

used to designate the end of a sub element, element or segment. Different characters must be chosen for the sub element, element and segment delimiters. These delimiting characters must never appear in the data.

For more information on the ISA segment and the possible values for its elements, contact DISA at the above address or consult the appropriate version of the ANSI ASC X12 Standards Reference document corresponding to the NAESB REQ transaction set being sent/received. Information about control segments (including the ISA and IEA) can be found in the Overview/Introduction and Control Standards sections of the reference document. Specific information about the ISA and IEA segments and corresponding elements can be found in the Segment Directory and Data Element Dictionary sections.

GS contents

The GS segment indicates the beginning of a functional group and provides control information for the data that follows it. A functional group can be defined as a group of transactions related to one business application. Within a mailing envelope, there may be a bundle of information relating to enrollments and a bundle of information relating to usages. (OPEN ISSUE 025) Each of these 'bundles' is sent within its own (or a separate) GS Functional Group Header and a GE Functional Group Trailer in the X12 environment. The sender of a transmission provides the Application Sender's Code that the receiver of the transmission will reflect back on acknowledging documents. The receiver of a transmission provides the Application Receiver's Code that the sender will include in the transmission for the receiver to utilize in routing to internal applications. Group Control Numbers are originated and maintained by the sender of the document.

For more information on the GS segment and the possible values for its elements, contact DISA at the above address or consult the appropriate version of the ANSI ASC X12 Standards Reference document corresponding to the NAESB REQ transaction set being sent/received. (OPEN ISSUE 023) Information about control segments (including the GS and GE) can be found in the Overview/Introduction and Control Standards sections of the reference document. Specific information about the GS and GE segments and corresponding elements can be found in the Segment Directory and Data Element Dictionary sections.

997 Usage

The 997 Functional Acknowledgment is used to indicate the results of the syntactical analysis of the X12 documents. The documents include the transaction sets and functional groups with an ISA/IEA envelope. This standard covers all of the X12 and NAESB REQ standard criteria that the receiver of the document has incorporated into the receiver's translator. The translator may be set to accept all information into the receiver's application processing, it may be set to accept only ANSI ASC X12 compliant information into the receiver's application processing, or it may be set to accept only ANSI ASC X12 and NAESB REQ compliant information into the receiver's application

processing. Compliance checking, in a translator, may be set to any of several levels. NAESB REQ recommends that compliance checking be set to the element level in the Functional Acknowledgement. (OPEN ISSUE 023)

The 997 informs the originator of the transaction whether the translator accepted the file, accepted it with errors, or rejected it. When errors occur, the 997 identifies the location and type of error that was encountered. Once a transaction passes the translator, the 997 is sent to the originator of the transaction and the data (if accepted) is passed on to the receiver's business application for processing.

XML Standards

{The purpose of this section is to define Party Roles and how they are implemented in the XML transactions. (OPEN ISSUE 019)}

Hypertext Transfer Protocol (HTTP)

The Hypertext Transfer Protocol (HTTP) is an application-level protocol with the lightness and speed necessary for distributed, collaborative, hypermedia information systems. It is a generic, stateless, object-oriented protocol which can be used for many tasks, such as name servers and distributed object management systems, through extension of its request methods (commands). A feature of HTTP is the typing of data representation, allowing systems to be built independently of the data being transferred.

HTTP has been in use by the World-Wide Web global information initiative since 1990. Appendix A of the NAESB REQ Electronic Delivery Mechanism Related Standards manual contains a listing of the HTTP version(s).

Page 1: [6] Formatted	George M. Behr	11/18/2003 4:08 PM
-----------------------	----------------	--------------------

Position: Horizontal: Center, Relative to: Margin, Vertical: 0", Relative to: Paragraph, Wrap Around

Page 40: [7] Deleted	George M. Behr	11/18/2003 4:43 PM
----------------------	----------------	--------------------

Data Element Name	Description
from	Common Code Identifier of sending/Client company, the server company which detected the error
to	Common Code Identifier of receiving/server company, the client company which sent the data set in error
input-format	"error"

input-data	A text block containing the following applicable items: orig-from The “from” value from the original transmission orig-to The “to” value from the original transmission. orig-input-format The “input-format” value from the original transmission. resp-time-c The “time-c” value from the original response. resp-server-id The “server-id” value from the original response. resp-trans-id The “trans-id” value from the original response. request-status The new status of the transaction based on some process beyond the receiving process such as decryption; see Table A, “Internet EDM Standard Error Codes and Messages”. comments Any comments the original receiving server wishes to include. <u>FOR RGQ AND REQ ONLY:</u> resp-time-c-qualifier The “time-c-qualifier” value from the original response.
------------	---

Page 47: [8] Deleted

gbehr

11/18/2003 11:03 AM

NOTE: Throughout all transfer tests, compare files stored on the server against the source file to ensure that the file transferred intact. While transferring to another company’s server, you may have to contact that company to send the file back to you so that you can perform the compare.

Install an interactive browser. Identify an existing Web server from among NAESB WGQ compliant servers offering interactive upload for test. See the NAESB WGQ home page for a list of organizations willing to act as testing partners. These organizations should have a URL complete with the CGI program name to which a tester may send test files. File content does not need to be X12 or other NAESB WGQ standard format to accomplish this step in testing.

Develop or acquire a batch browser that uses multipart for the encoding methodology. Transfer the same test file as in step 1 to the URL not requiring Realm One security.

Add Realm One security to your file transfer, and change the URL to the secure URL. Continue transfer tests with your batch browser.

Acquire and install PGP or OpenPGP compliant software. Generate your public and private key pair. Make sure to choose the RSA key generation algorithm for PGP or DSA and El Gamal for OpenPGP. Download the test server’s test public key. Encrypt your data file using this key. Modify your file transfer to send the encrypted file.

Continue transfer tests. Request that the test server contact decrypt your file.

Server and CGI

Install Web server. Establish an Internet connection to your server. Ensure that you have ample storage space for transferred files. Ensure that permissions are granted to the directories.

Page 47: [9] Deleted

gbehr

11/18/2003 11:04 AM

Acquire or develop a CGI program to receive file transfers and process according to NAESB WGQ standards. Test transfers to your CGI using your batch browser.

Transfer a X12 or other NAESB WGQ standard format dataset to your server and process it through your translator or other appropriate processes.

Copy the CGI to a “secure” directory where Realm One security, or basic authentication, is enabled. Using your batch browser, transfer to both URLs, with and without

authentication.

Page 47: [10] Deleted	gbehr	11/18/2003 11:04 AM
------------------------------	--------------	----------------------------

Generate a second public/private key pair. Use the second key to encrypt a file and transfer the file to your server. Decrypt the file.

Once your site security is established, contact a trading partner to test transfers against your server.

Test with various file sizes to ensure that your CGI can process small and large files.

Page 1: [11] Formatted	George M. Behr	11/18/2003 4:08 PM
-------------------------------	-----------------------	---------------------------

Position: Horizontal: Center, Relative to: Margin, Vertical: 0", Relative to: Paragraph, Wrap Around

Page 49: [12] Formatted	George M. Behr	11/18/2003 4:45 PM
--------------------------------	-----------------------	---------------------------

Font: 8 pt, Complex Script Font: 8 pt

Page 49: [13] Formatted	George M. Behr	11/18/2003 4:46 PM
--------------------------------	-----------------------	---------------------------

Space Before: 0 pt, After: 0 pt

Page 49: [14] Change	George M. Behr	11/18/2003 4:46 PM
-----------------------------	-----------------------	---------------------------

Formatted Table

Page 49: [15] Formatted	George M. Behr	11/18/2003 4:46 PM
--------------------------------	-----------------------	---------------------------

Space Before: 0 pt, After: 0 pt

Page 49: [16] Formatted	George M. Behr	11/18/2003 4:46 PM
--------------------------------	-----------------------	---------------------------

Space Before: 0 pt, After: 0 pt

Page 49: [17] Formatted	George M. Behr	11/18/2003 4:46 PM
--------------------------------	-----------------------	---------------------------

Space Before: 0 pt, After: 0 pt

Page 49: [18] Formatted	George M. Behr	11/18/2003 4:46 PM
--------------------------------	-----------------------	---------------------------

Space Before: 0 pt, After: 0 pt

Page 49: [19] Formatted	George M. Behr	11/18/2003 4:46 PM
--------------------------------	-----------------------	---------------------------

Space Before: 0 pt, After: 0 pt

Page 49: [20] Formatted	George M. Behr	11/18/2003 4:46 PM
--------------------------------	-----------------------	---------------------------

Space Before: 0 pt, After: 0 pt

Page 49: [21] Formatted	George M. Behr	11/18/2003 4:46 PM
--------------------------------	-----------------------	---------------------------

Space Before: 0 pt, After: 0 pt

Page 49: [22] Formatted	George M. Behr	11/18/2003 4:46 PM
--------------------------------	-----------------------	---------------------------

Space Before: 0 pt, After: 0 pt

Page 49: [23] Formatted	George M. Behr	11/18/2003 4:46 PM
--------------------------------	-----------------------	---------------------------

Space Before: 0 pt, After: 0 pt

Page 49: [24] Formatted	George M. Behr	11/18/2003 4:46 PM
--------------------------------	-----------------------	---------------------------

Space Before: 0 pt, After: 0 pt

Page 49: [25] Formatted	George M. Behr	11/18/2003 4:46 PM
--------------------------------	-----------------------	---------------------------

Space Before: 0 pt, After: 0 pt

Page 49: [26] Formatted	George M. Behr	11/18/2003 4:46 PM
--------------------------------	-----------------------	---------------------------

Space Before: 0 pt, After: 0 pt

Page 49: [27] Formatted	George M. Behr	11/18/2003 4:46 PM
--------------------------------	-----------------------	---------------------------

Space Before: 0 pt, After: 0 pt

Page 49: [28] Formatted	George M. Behr	11/18/2003 4:46 PM
Space Before: 0 pt, After: 0 pt		
Page 49: [29] Formatted	George M. Behr	11/18/2003 4:46 PM
Space Before: 0 pt, After: 0 pt		
Page 49: [30] Formatted	George M. Behr	11/18/2003 4:46 PM
Space Before: 0 pt, After: 0 pt		
Page 49: [31] Formatted	George M. Behr	11/18/2003 4:46 PM
Space Before: 0 pt, After: 0 pt		
Page 49: [32] Formatted	George M. Behr	11/18/2003 4:46 PM
Space Before: 0 pt, After: 0 pt		
Page 49: [33] Formatted	George M. Behr	11/18/2003 4:46 PM
Space Before: 0 pt, After: 0 pt		
Page 49: [34] Formatted	George M. Behr	11/18/2003 4:46 PM
Space Before: 0 pt, After: 0 pt		
Page 49: [35] Formatted	George M. Behr	11/18/2003 4:46 PM
Space Before: 0 pt, After: 0 pt		
Page 49: [36] Formatted	George M. Behr	11/18/2003 4:46 PM
Space Before: 0 pt, After: 0 pt		
Page 49: [37] Formatted	George M. Behr	11/18/2003 4:46 PM
Space Before: 0 pt, After: 0 pt		
Page 49: [38] Formatted	George M. Behr	11/18/2003 4:46 PM
Space Before: 0 pt, After: 0 pt		
Page 49: [39] Formatted	George M. Behr	11/18/2003 4:46 PM
Space Before: 0 pt, After: 0 pt		
Page 49: [40] Formatted	George M. Behr	11/18/2003 4:46 PM
Space Before: 0 pt, After: 0 pt		
Page 49: [41] Deleted	George M. Behr	11/18/2003 4:45 PM

(OPEN ISSUE 017)

Page 49: [42] Deleted	gbehr	11/18/2003 11:44 AM
EDM party		
Page 49: [42] Deleted	gbehr	11/18/2003 11:42 AM
EDI		
Page 49: [43] Formatted	George M. Behr	11/18/2003 4:46 PM
NAESB TableText		
Page 49: [44] Deleted	George M. Behr	11/18/2003 4:45 PM

(OPEN ISSUE 017)

Page 49: [45] Formatted	George M. Behr	11/18/2003 4:46 PM
Space Before: 0 pt, After: 0 pt		
Page 49: [46] Formatted	George M. Behr	11/18/2003 4:46 PM
Space Before: 0 pt, After: 0 pt		
Page 49: [47] Deleted	George M. Behr	11/18/2003 4:45 PM

(OPEN ISSUE 017)

Page 49: [48] Formatted	George M. Behr	11/18/2003 4:46 PM
Space Before: 0 pt, After: 0 pt		
Page 49: [49] Formatted	George M. Behr	11/18/2003 4:46 PM
Space Before: 0 pt, After: 0 pt		
Page 49: [50] Formatted	George M. Behr	11/18/2003 4:46 PM
Space Before: 0 pt, After: 0 pt		
Page 49: [51] Formatted	George M. Behr	11/18/2003 4:46 PM
Space Before: 0 pt, After: 0 pt		
Page 49: [52] Formatted	George M. Behr	11/18/2003 4:46 PM
Space Before: 0 pt, After: 0 pt		
Page 1: [53] Formatted	George M. Behr	11/18/2003 4:08 PM
Position: Horizontal: Center, Relative to: Margin, Vertical: 0", Relative to: Paragraph, Wrap Around		
Page 50: [54] Inserted	grego93	11/17/2003 2:58 PM
10 – Appendices		

APPENDIX A - REFERENCE GUIDE

Receiving Program

Options include Active Server Pages (ASP), Common Gateway Interface (CGI), Java Server Pages (JSP), Java Servlet technology and other technologies.

Information on ASP may be found on Microsoft's web site (www.microsoft.com).

A source on CGI is a book entitled "Special Edition Using CGI" by Jeffrey Dwight and Michael Erwin.

Information on JSP and Servlet technology may be found at SUN's web site (<http://java.sun.com>).

Firewall Security

A source which covers this topic in detail is a book entitled "Firewalls and Internet Security: Repelling the Wily Hacker" by William Cheswick and Steven Bellovin.

NAESB

NAESB Web Site: (www.naesb.org) Primary reference for energy industry standards.

HTTP

The NAESB Internet ET architecture is based on HTTP 1.1, and all implementations should be compatible with this version.

W3C WorldWide Web Consortium. All aspects of HTTP, HTML, and other Web-related topics are documented at:

www.w3.org/pub/WWW/

General information regarding HTTP with basic terminology included are documented at:

www.w3.org/pub/WWW/Protocols/HTTP/1.1/spec.html

Syntax information for multipart can be found in IETF RFC1341 section 7.2.

(www.ietf.org)

HTML

Information on HTML 4.0 may be found at www.w3.org/TR/REC-html40/. (OPEN ISSUE 018)

www.ncsa.uiuc.edu/General/Internet/WWW/HTMLPrimer.html

PGP Software

PGP is available for a variety of operating systems and platforms. For more information contact Network Associates (www.nai.com) or PGP Corporation, (www.pgp.com)

OpenPGP Software

The IETF OpenPGP standard is available at www.ietf.org/rfc/rfc2440.txt

Software implementations of the OpenPGP standard are freely available for commercial use from the Free Software Foundation at www.gnupg.org.

Time Synchronization

Testing has shown that the clocks on all computer systems drift. Time synchronization is required to assure that all trading partners transaction times are accurate. Time accuracy is dependent on how much a system's clock drifts, how frequently it is resynchronized and the accuracy of the source used for synchronization.

Authoritative time synchronization is now being provided by governmental agencies around the world based on a synchronized network of atomic clocks. In the United States this includes the U. S. Naval Observatory and the National Institute of Standards and Technology.

An easy way to obtain the current time is from the U. S. Naval Observatory's Web site at tycho.usno.navy.mil/cgi-bin/timer.pl. The output from this page can easily be edited and reformatted to set a local system's time. Commercial, shareware and public domain packages are also available to synchronize system times. Among them are NTP (which is an Internet standard), Internet daytime, nisttime / usnotime.

Further information on time synchronization may be found at the following Web sites:

<http://tycho.usno.navy.mil/ntp.html>

www.ccd.bnl.gov/xntp

Page 53: [55] Formatted	George M. Behr	11/18/2003 3:40 PM
Indent: Before: 0"		
Page 53: [56] Formatted	George M. Behr	11/18/2003 3:41 PM
Font: 9 pt, Complex Script Font: 9 pt		
Page 53: [57] Change	George M. Behr	11/18/2003 4:48 PM
Formatted Table		
Page 53: [58] Formatted	George M. Behr	11/18/2003 3:40 PM
Indent: Before: 0"		
Page 53: [59] Formatted	George M. Behr	11/18/2003 3:41 PM
Font: 9 pt, Complex Script Font: 9 pt		
Page 53: [60] Change	George M. Behr	11/18/2003 2:24 PM
Formatted Table		
Page 53: [61] Formatted	George M. Behr	11/18/2003 3:40 PM
Indent: Before: 0"		
Page 53: [62] Formatted	George M. Behr	11/18/2003 3:40 PM
Font: 9 pt, Complex Script Font: 9 pt		
Page 53: [63] Formatted	George M. Behr	11/18/2003 2:27 PM
Left		
Page 53: [64] Change	George M. Behr	11/18/2003 4:48 PM
Formatted Table		
Page 53: [65] Formatted	George M. Behr	11/18/2003 2:27 PM

Left

Page 53: [66] Formatted	George M. Behr	11/18/2003 2:27 PM
--------------------------------	-----------------------	---------------------------

Left

Page 53: [67] Formatted	George M. Behr	11/18/2003 2:27 PM
--------------------------------	-----------------------	---------------------------

Left

Page 53: [68] Formatted	George M. Behr	11/18/2003 2:27 PM
--------------------------------	-----------------------	---------------------------

Left

Page 53: [69] Formatted	George M. Behr	11/18/2003 3:40 PM
--------------------------------	-----------------------	---------------------------

Font: 9 pt, Complex Script Font: 9 pt

Page 53: [70] Formatted	George M. Behr	11/18/2003 2:27 PM
--------------------------------	-----------------------	---------------------------

Left

Page 53: [71] Formatted	George M. Behr	11/18/2003 3:40 PM
--------------------------------	-----------------------	---------------------------

Font: 9 pt, Complex Script Font: 9 pt

Page 53: [72] Formatted	George M. Behr	11/18/2003 2:27 PM
--------------------------------	-----------------------	---------------------------

Left

Page 53: [73] Formatted	George M. Behr	11/18/2003 3:40 PM
--------------------------------	-----------------------	---------------------------

Font: 9 pt, Complex Script Font: 9 pt

Page 53: [74] Formatted	George M. Behr	11/18/2003 2:27 PM
--------------------------------	-----------------------	---------------------------

Left

Page 53: [75] Formatted	George M. Behr	11/18/2003 3:40 PM
--------------------------------	-----------------------	---------------------------

Font: 9 pt, Complex Script Font: 9 pt

Page 53: [76] Formatted	George M. Behr	11/18/2003 2:27 PM
--------------------------------	-----------------------	---------------------------

Left

Page 53: [77] Formatted	George M. Behr	11/18/2003 3:40 PM
--------------------------------	-----------------------	---------------------------

Font: 9 pt, Complex Script Font: 9 pt

Page 53: [78] Formatted	George M. Behr	11/18/2003 2:27 PM
--------------------------------	-----------------------	---------------------------

Left

Page 53: [79] Formatted	George M. Behr	11/18/2003 3:40 PM
--------------------------------	-----------------------	---------------------------

Font: 9 pt, Complex Script Font: 9 pt

Page 53: [80] Formatted	George M. Behr	11/18/2003 2:27 PM
--------------------------------	-----------------------	---------------------------

Left

Page 53: [81] Formatted	George M. Behr	11/18/2003 2:27 PM
--------------------------------	-----------------------	---------------------------

Left

Page 53: [82] Formatted	George M. Behr	11/18/2003 2:27 PM
--------------------------------	-----------------------	---------------------------

Left

Page 53: [83] Formatted	George M. Behr	11/18/2003 2:27 PM
--------------------------------	-----------------------	---------------------------

Left

Page 53: [84] Formatted	George M. Behr	11/18/2003 2:27 PM
--------------------------------	-----------------------	---------------------------

Left

Page 53: [85] Formatted	George M. Behr	11/18/2003 2:27 PM
--------------------------------	-----------------------	---------------------------

Left

Page 53: [86] Formatted	George M. Behr	11/18/2003 2:27 PM
--------------------------------	-----------------------	---------------------------

Left

Page 53: [87] Formatted	George M. Behr	11/18/2003 2:27 PM
-------------------------	----------------	--------------------

Left

Page 53: [88] Formatted	George M. Behr	11/18/2003 2:27 PM
-------------------------	----------------	--------------------

Left

Page 53: [89] Formatted	George M. Behr	11/18/2003 2:27 PM
-------------------------	----------------	--------------------

Left

Page 53: [90] Formatted	George M. Behr	11/18/2003 2:27 PM
-------------------------	----------------	--------------------

Left

Page 53: [91] Formatted	George M. Behr	11/18/2003 2:27 PM
-------------------------	----------------	--------------------

Left

Page 53: [92] Formatted	George M. Behr	11/18/2003 2:27 PM
-------------------------	----------------	--------------------

Left

Page 53: [93] Formatted	George M. Behr	11/18/2003 2:27 PM
-------------------------	----------------	--------------------

Left

Page 53: [94] Formatted	George M. Behr	11/18/2003 2:27 PM
-------------------------	----------------	--------------------

Left

Page 53: [95] Formatted	George M. Behr	11/18/2003 2:27 PM
-------------------------	----------------	--------------------

Left

Page 53: [96] Deleted	George M. Behr	11/18/2003 2:22 PM
-----------------------	----------------	--------------------

Page Break

??Appendix E – HTTP Standards (??from old document)

Page 53: [97] Formatted	George M. Behr	11/18/2003 3:41 PM
-------------------------	----------------	--------------------

NAESB Section Title, Tabs: Not at 0.63"

Page 1: [98] Formatted	George M. Behr	11/18/2003 4:08 PM
------------------------	----------------	--------------------

Position: Horizontal: Center, Relative to: Margin, Vertical: 0", Relative to: Paragraph, Wrap Around